


# SABLE ISLAND

# OBSERVATORY

## Monthly Geomagnetic

## Bulletin

APRIL 2000 WM/00/04/SBL

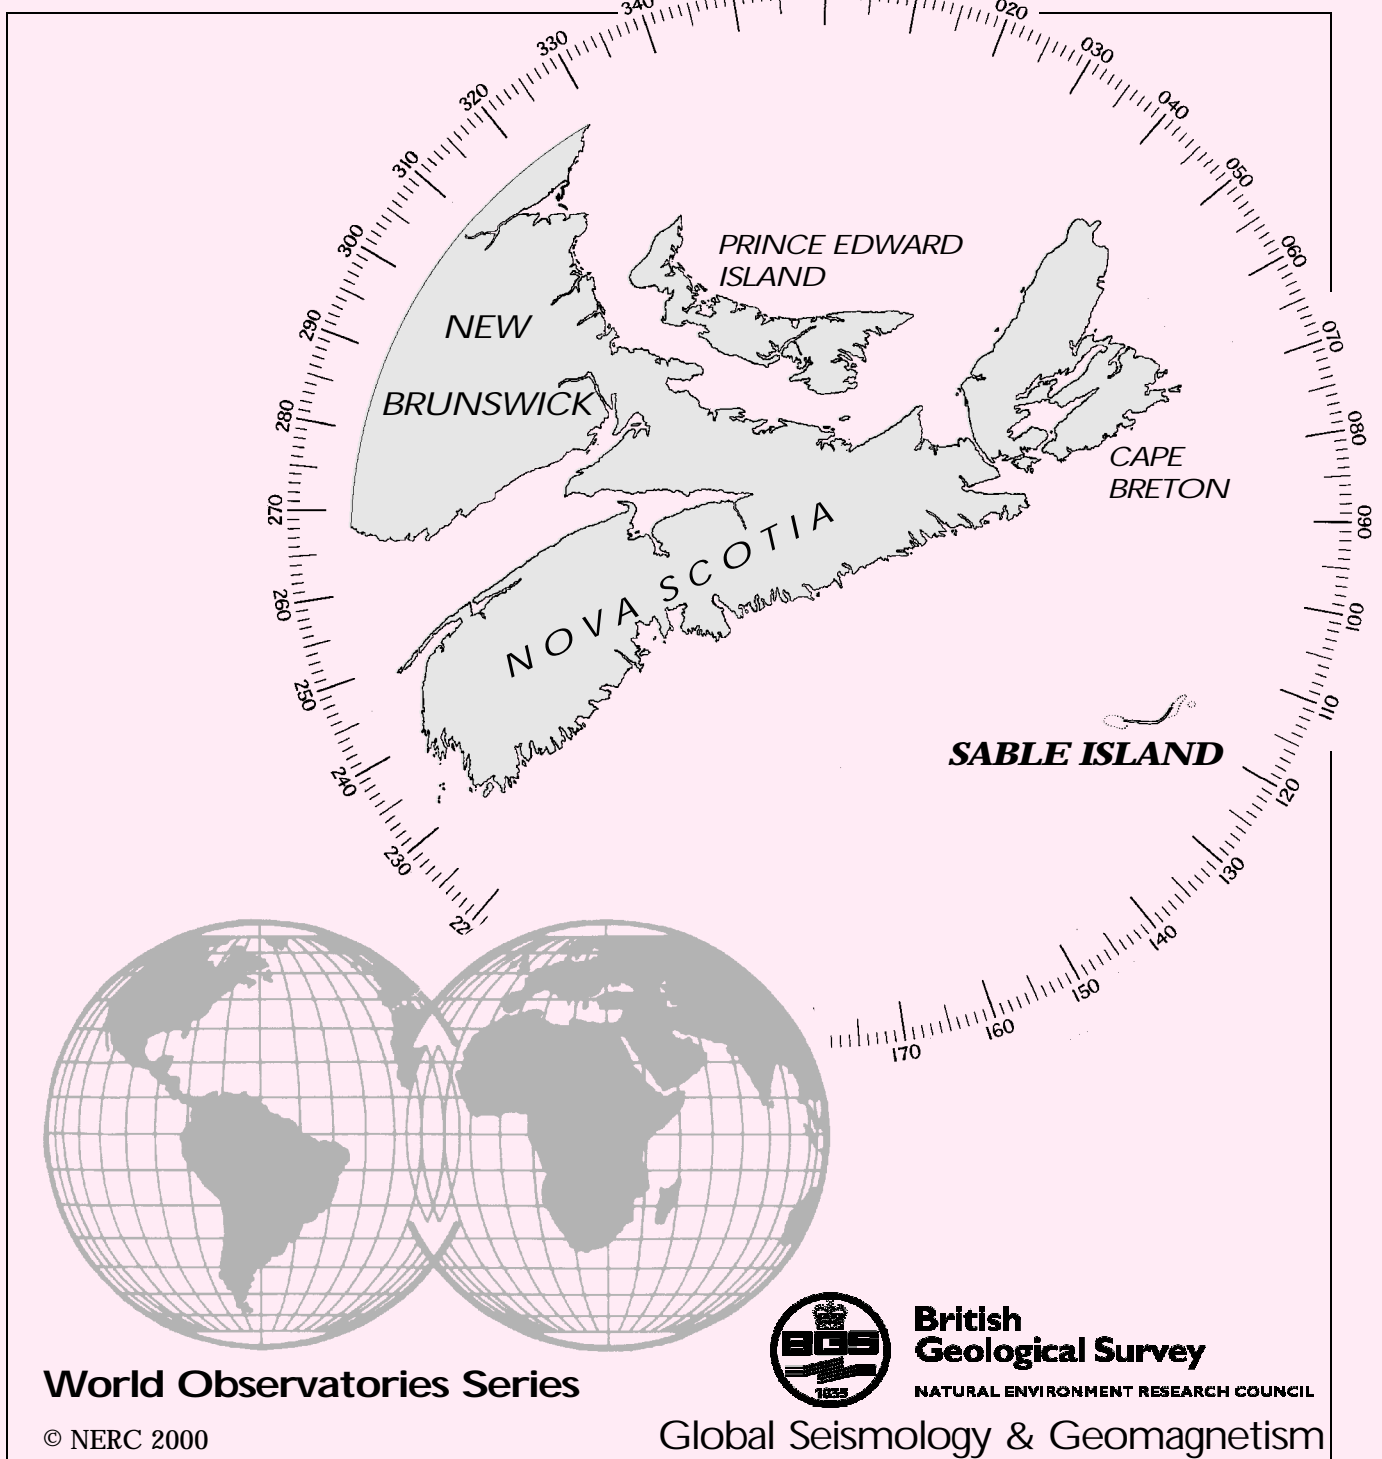

World Observatories Series

© NERC 2000



**British  
Geological Survey**

NATURAL ENVIRONMENT RESEARCH COUNCIL

Global Seismology & Geomagnetism

# 1. SABLE ISLAND OBSERVATORY MAGNETIC DATA

## 1.1 Introduction

Sable Island is the third overseas geomagnetic observatory to be established by BGS. The installation, funded by a joint venture between BGS, Sperry-Sun Drilling Services and Sable Offshore Energy, was completed in May 1999 and the observatory became operational from 8<sup>th</sup> May 1999.

This bulletin is organised into two main sections. The first section presents the magnetic observatory results, which are described in 1.3. Section 2 provides a description of the observatory operation and quality control procedures. The absolute observations and quality control plots are presented. Enquiries about the data should be addressed to:-

National Geomagnetic Service  
British Geological Survey  
Murchison House, West Mains Road  
Edinburgh EH9 3LA  
Scotland, UK

Tel: +44 (0) 131 667 1000  
Fax: +44 (0) 131 668 4368  
E-mail: [p.white@bgs.ac.uk](mailto:p.white@bgs.ac.uk)  
World-Wide Web: <http://www.nmh.ac.uk/>

## 1.2 Position

The Island is a sandbank formed by the meeting of currents from the St.Lawrence Delta and the Gulf Stream and is located approximately 290km southeast of Halifax, Nova Scotia.

The observatory co-ordinates are:-

Geographic: 43° 55.9¢N 299° 0.4¢E  
Geomagnetic: 54° 15.5¢N 13° 14.9¢E  
Height above mean sea level: 5m (approx)

The geomagnetic co-ordinates are calculated using the 8<sup>th</sup> generation International Geomagnetic Reference Field (IGRF) at epoch 2000.5.

## 1.3 Data Presentation

The data presented in the bulletin are in the form of plots and tabulations described in the following sections.

### 1.3.1 Summary magnetograms

Small-scale magnetograms are plotted which allow the month's data to be viewed at a glance. They are plotted with 16 days on a page, showing the variations in declination (*D*), horizontal intensity (*H*) and vertical intensity (*Z*). The scales are shown on the right-hand side of the page. Occasionally the amplitude of disturbance requires that the scales be multiplied by a factor throughout the course of one day, which is indicated above the panel for that day. The variations are centred on the monthly mean value, shown on the left side of the page.

### 1.3.2 Magnetograms

The magnetograms are plotted using one-minute values of *D*, inclination (*I*) and total field intensity (*F*) derived from the measurements made using the fluxgate sensors. The magnetograms are plotted to a variable scale; scale bars are shown to the right of each plot. The absolute level (the monthly mean value) is indicated on the left side of the plots.


### 1.3.3 Daily and Monthly Mean Values


Daily mean values of *D*, *H*, *Z* and *F* are plotted throughout the year. In addition a table of monthly mean values of all the geomagnetic elements is provided. These values depend on accurate specification of the fluxgate sensor baselines. Provisional and definitive values are indicated in the table as **P** or **D** respectively. It is anticipated that provisional values will not be altered by more than a few nT or tenths of arcminutes before being made definitive.

Sable Island

April

2000

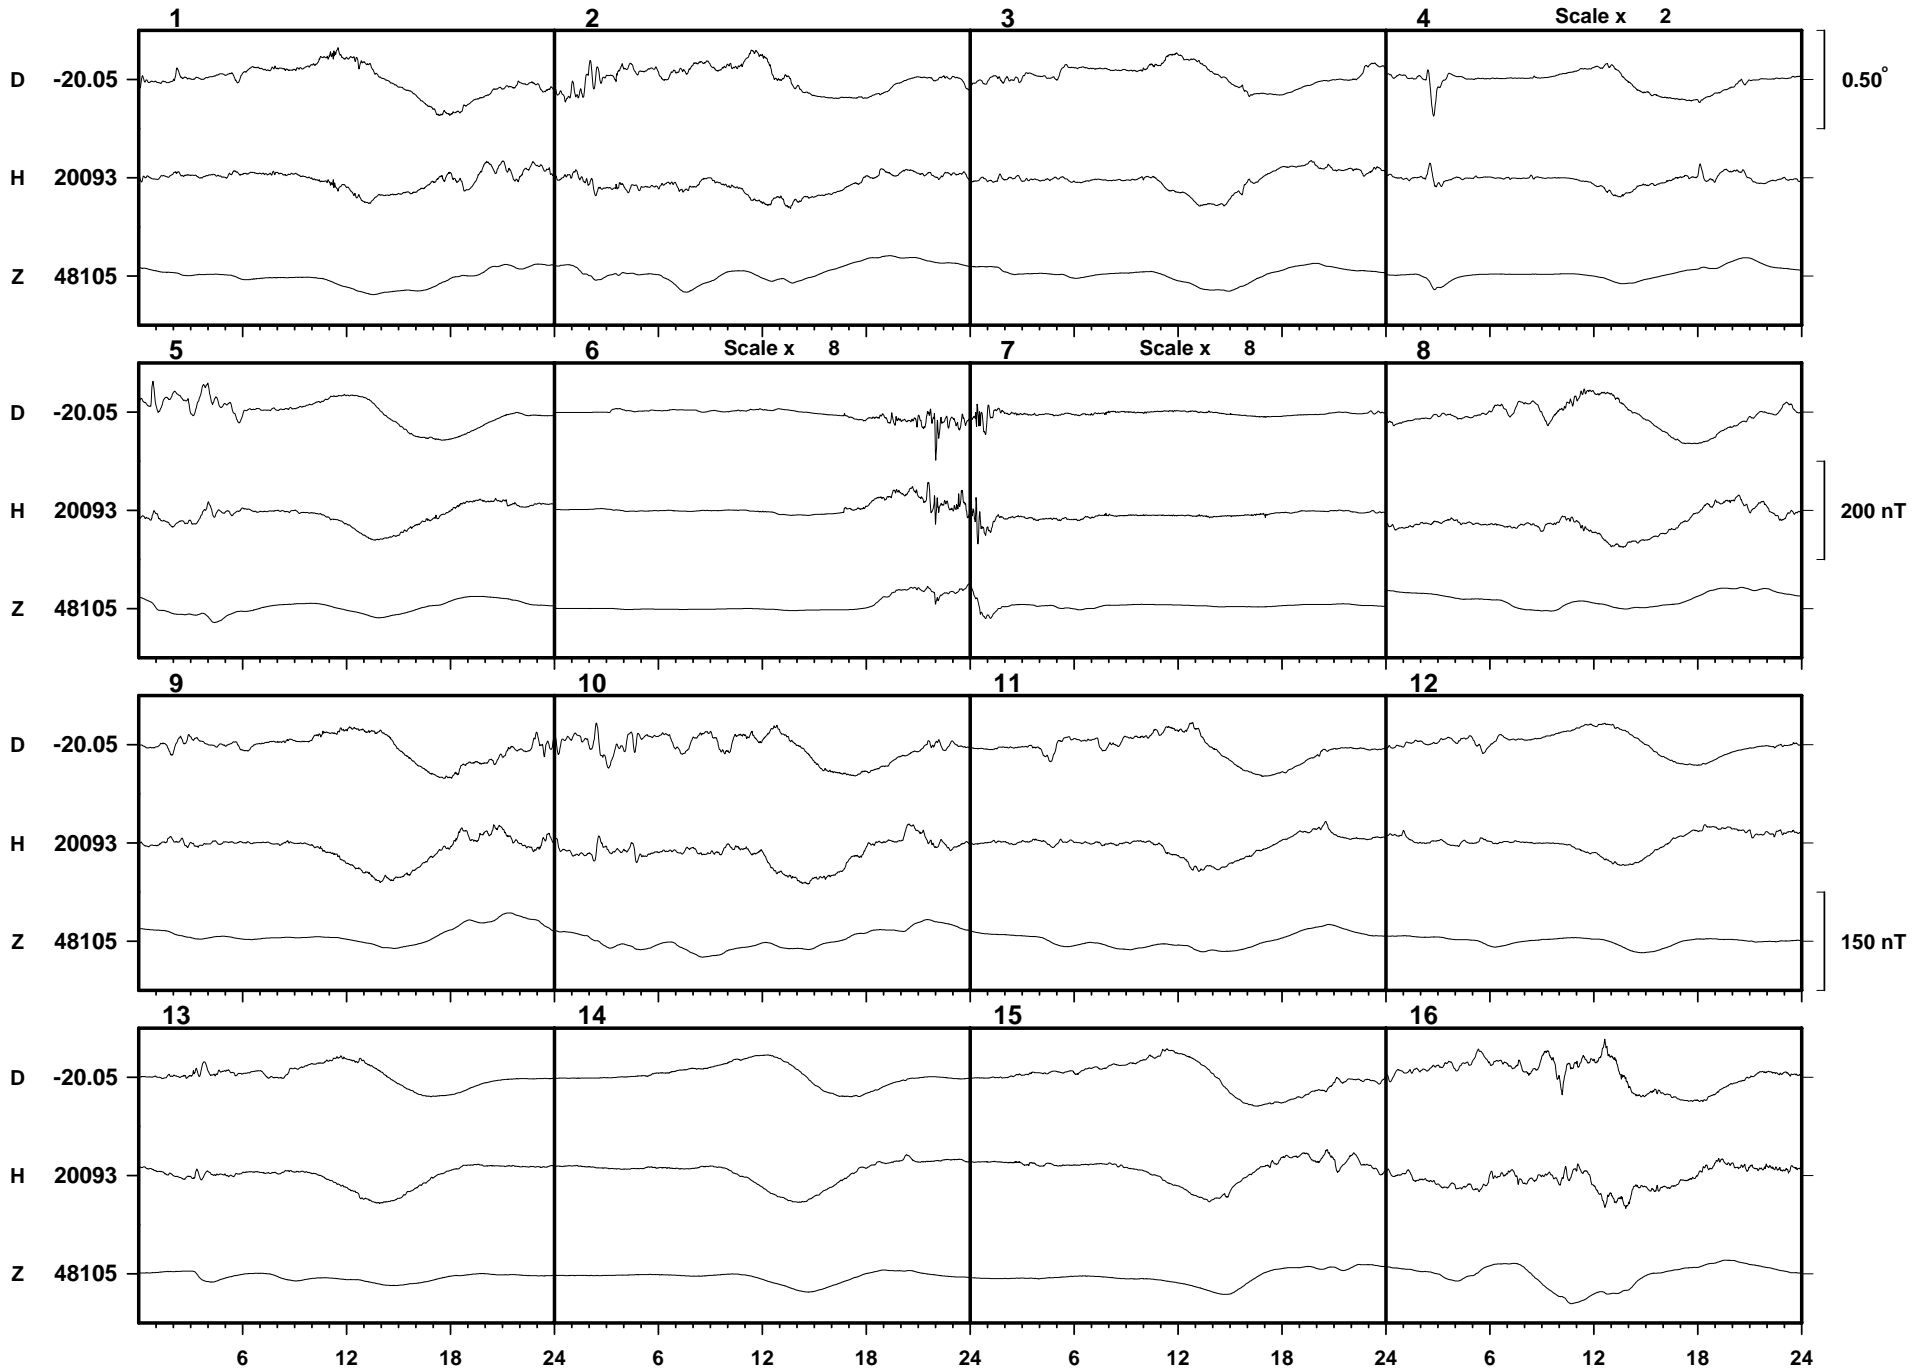

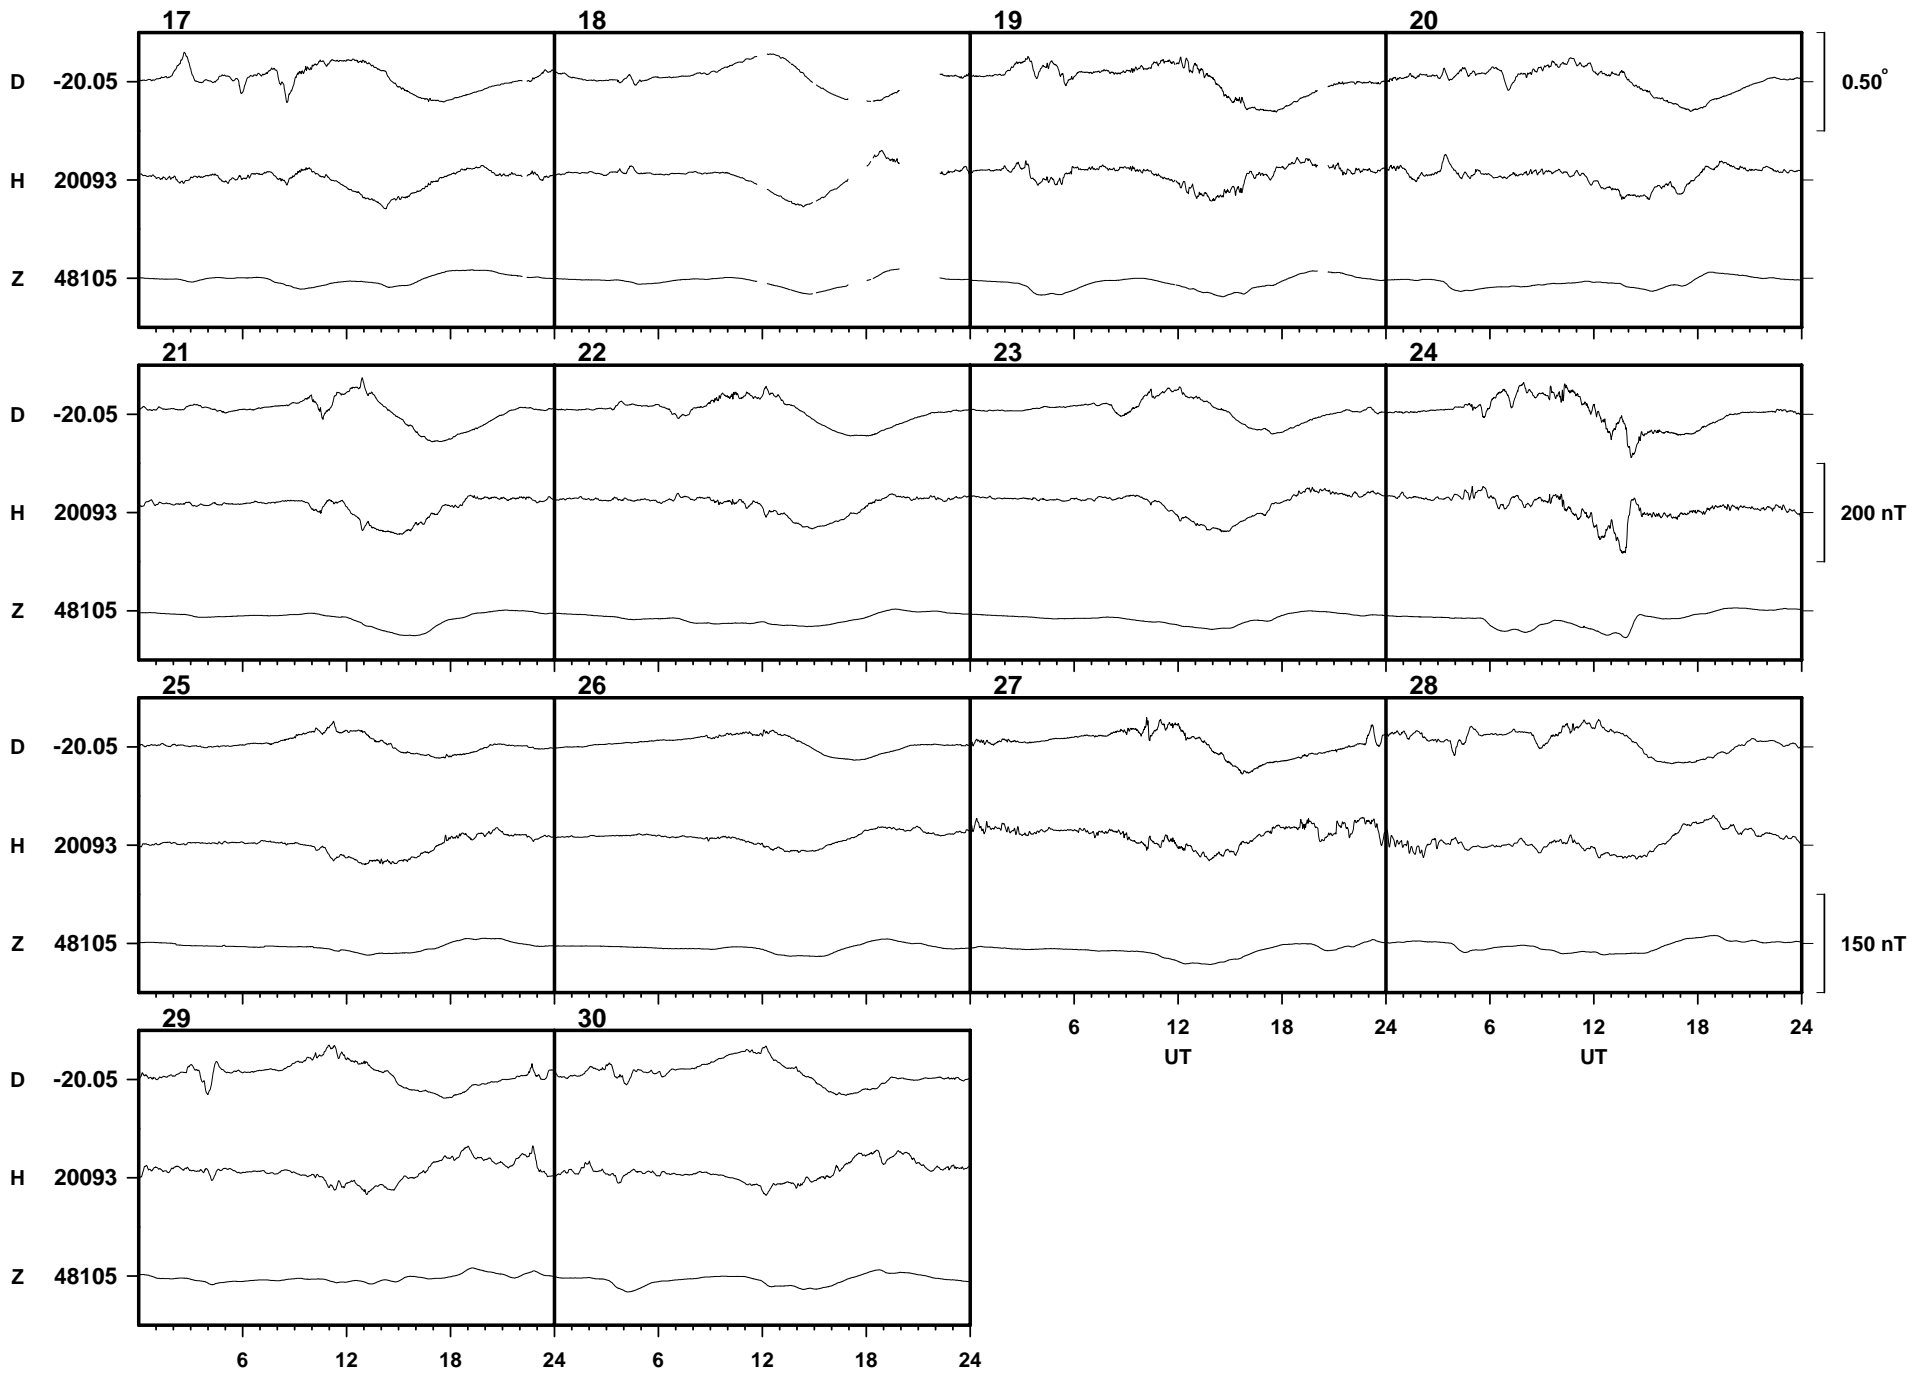

Sable Island


April

2000

Date: 01-04-2000


# Sable Island

Day number: 092

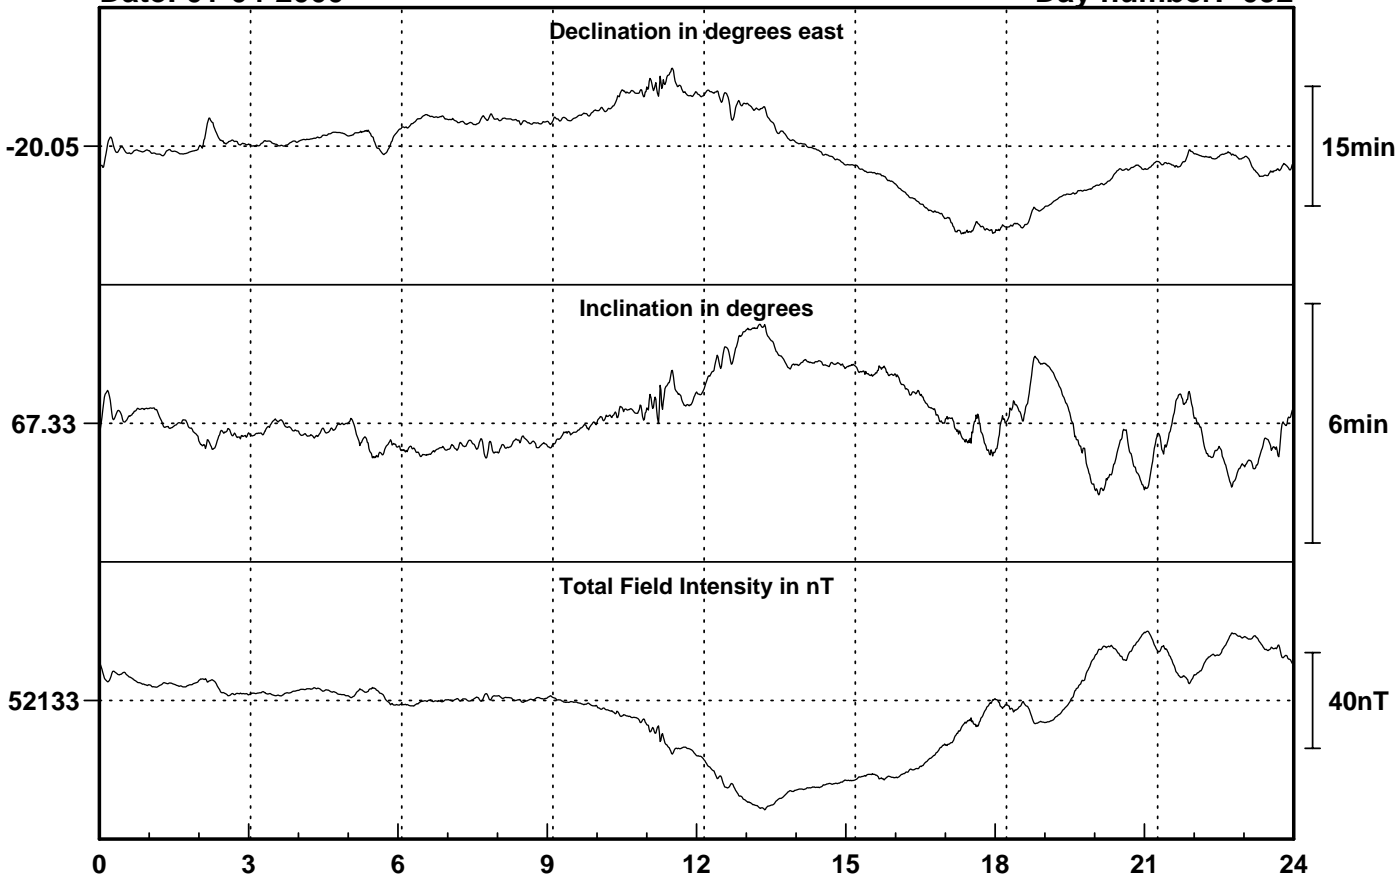

Date: 02-04-2000


Day number: 093

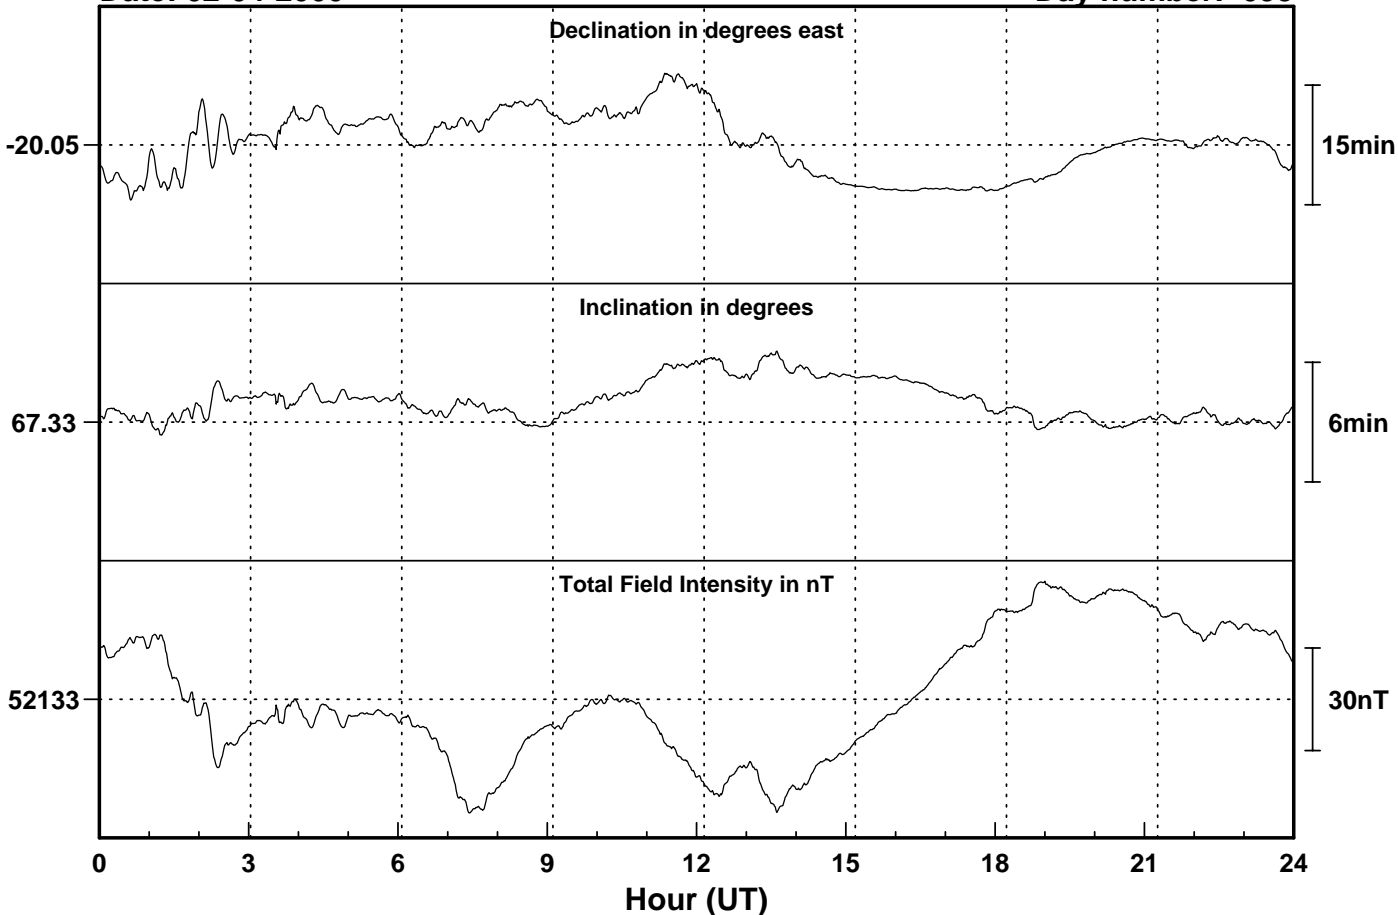

Date: 03-04-2000


# Sable Island

Day number: 094

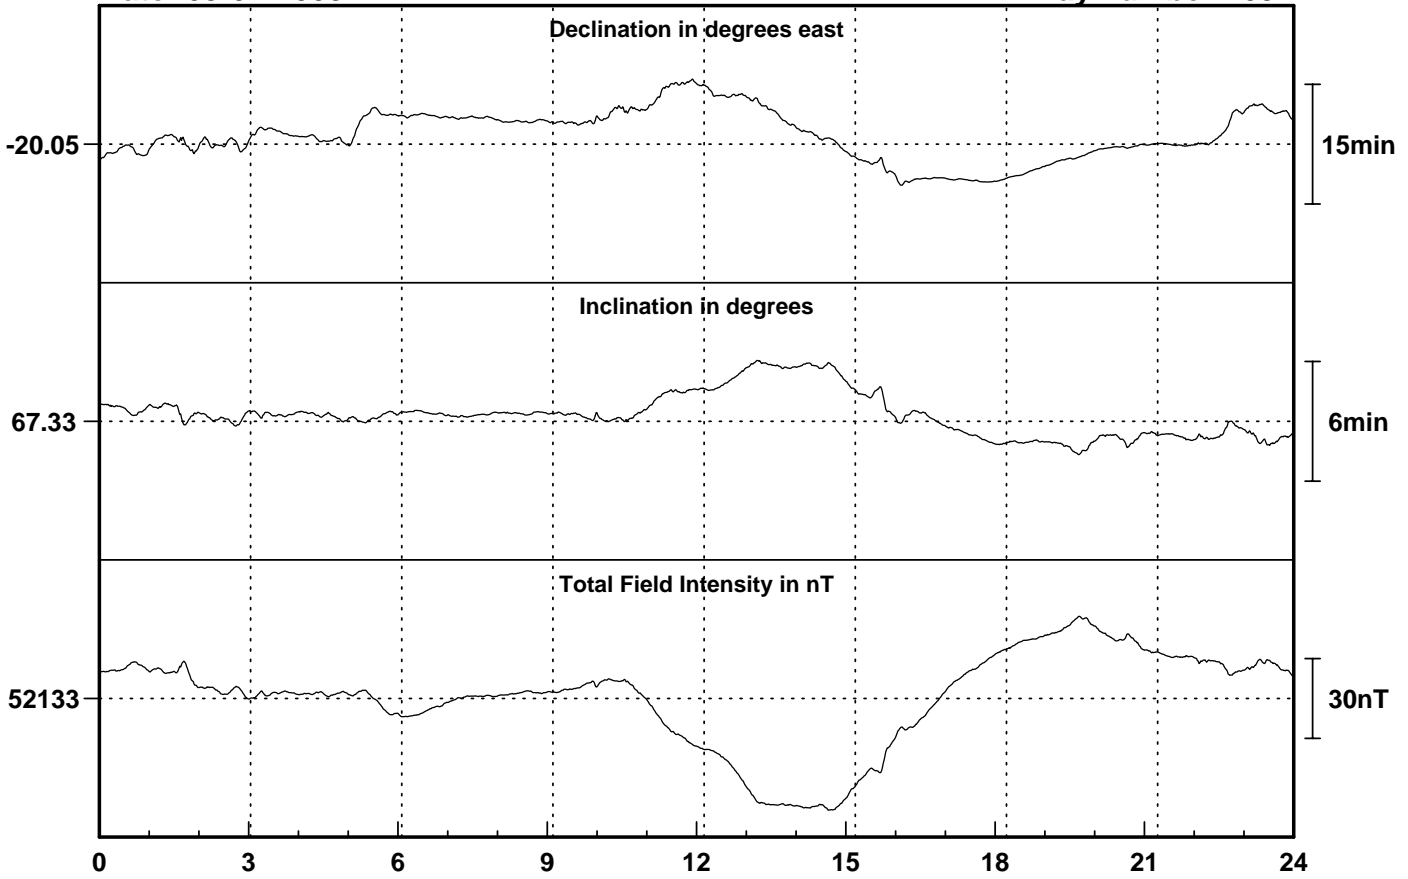

Date: 04-04-2000


Day number: 095

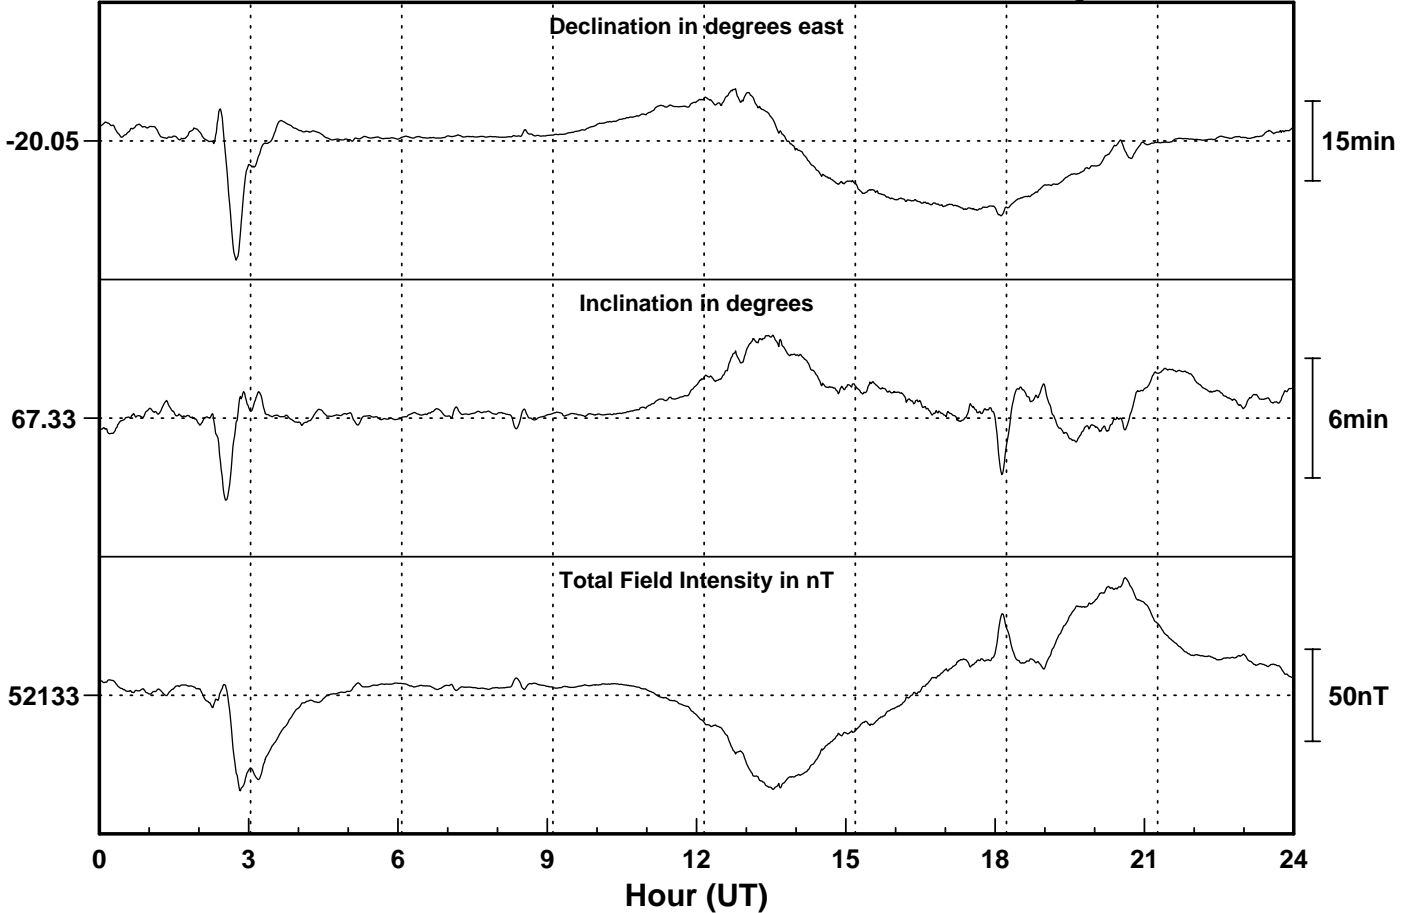

Date: 05-04-2000


### Sable Island

Day number: 096

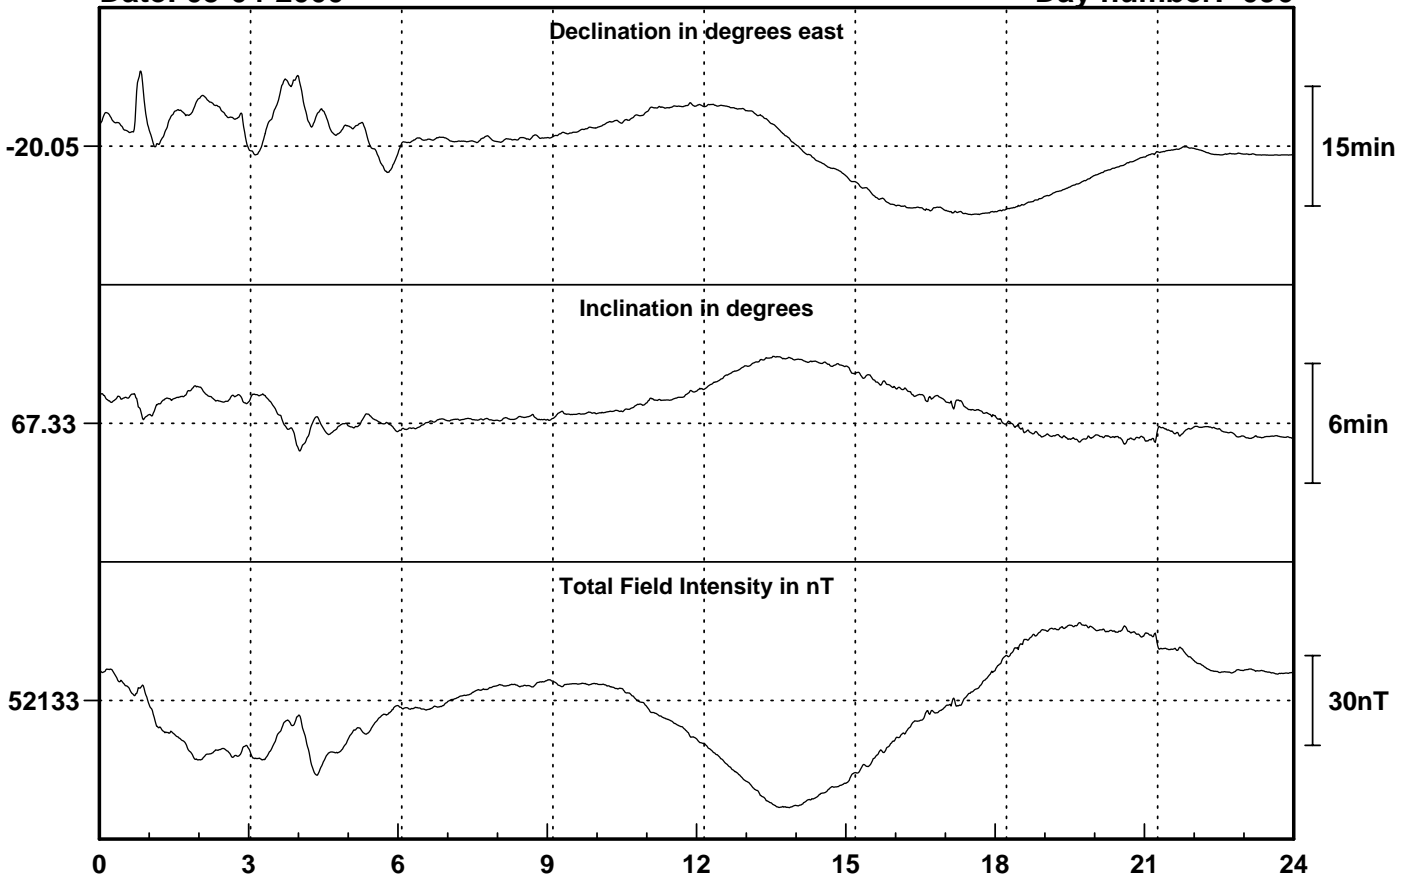

Date: 06-04-2000


Day number: 097

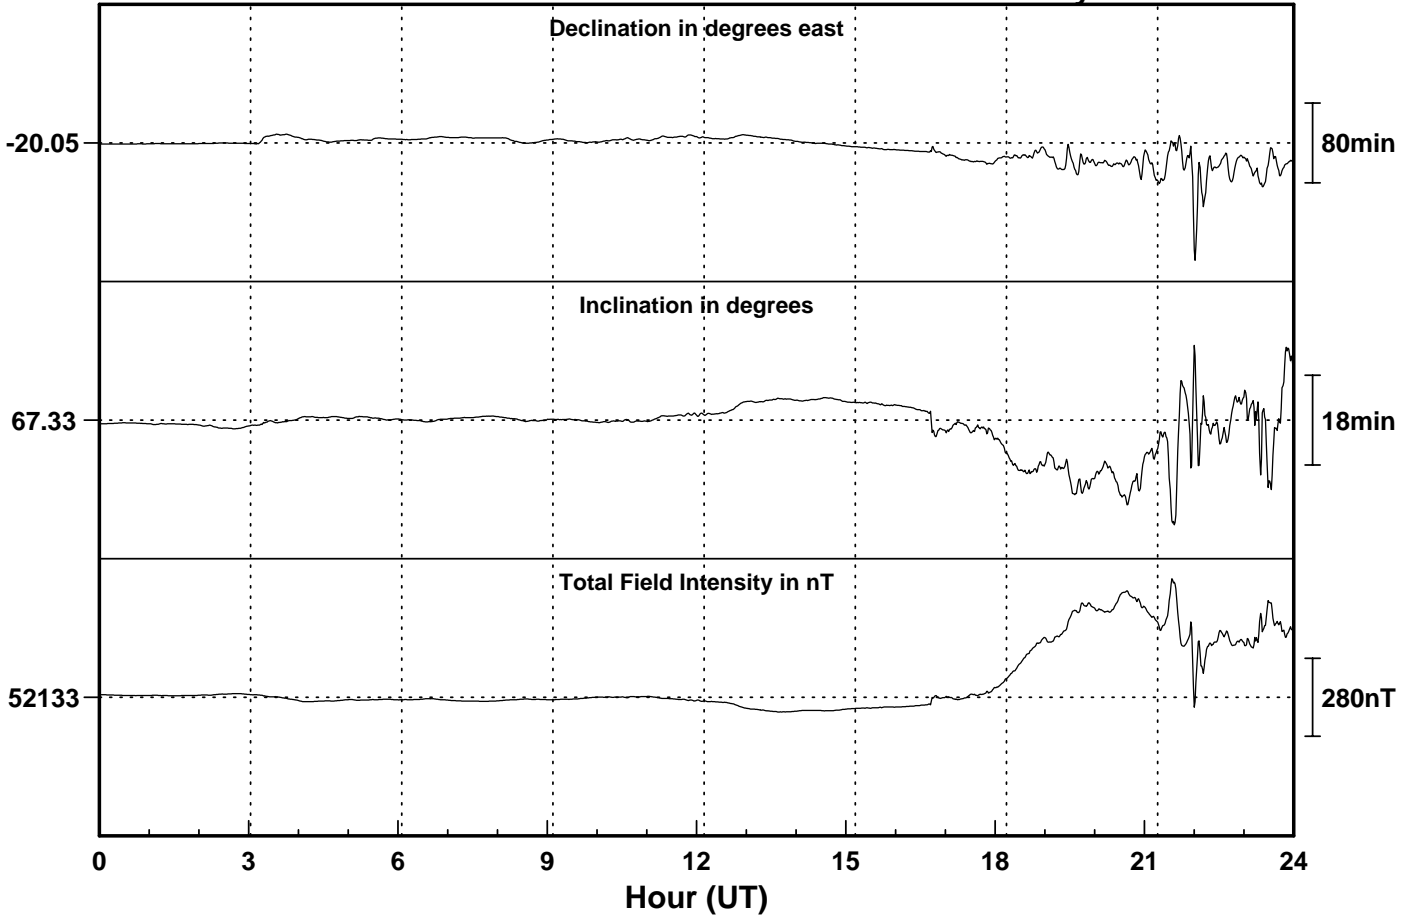

Date: 07-04-2000


### Sable Island

Day number: 098

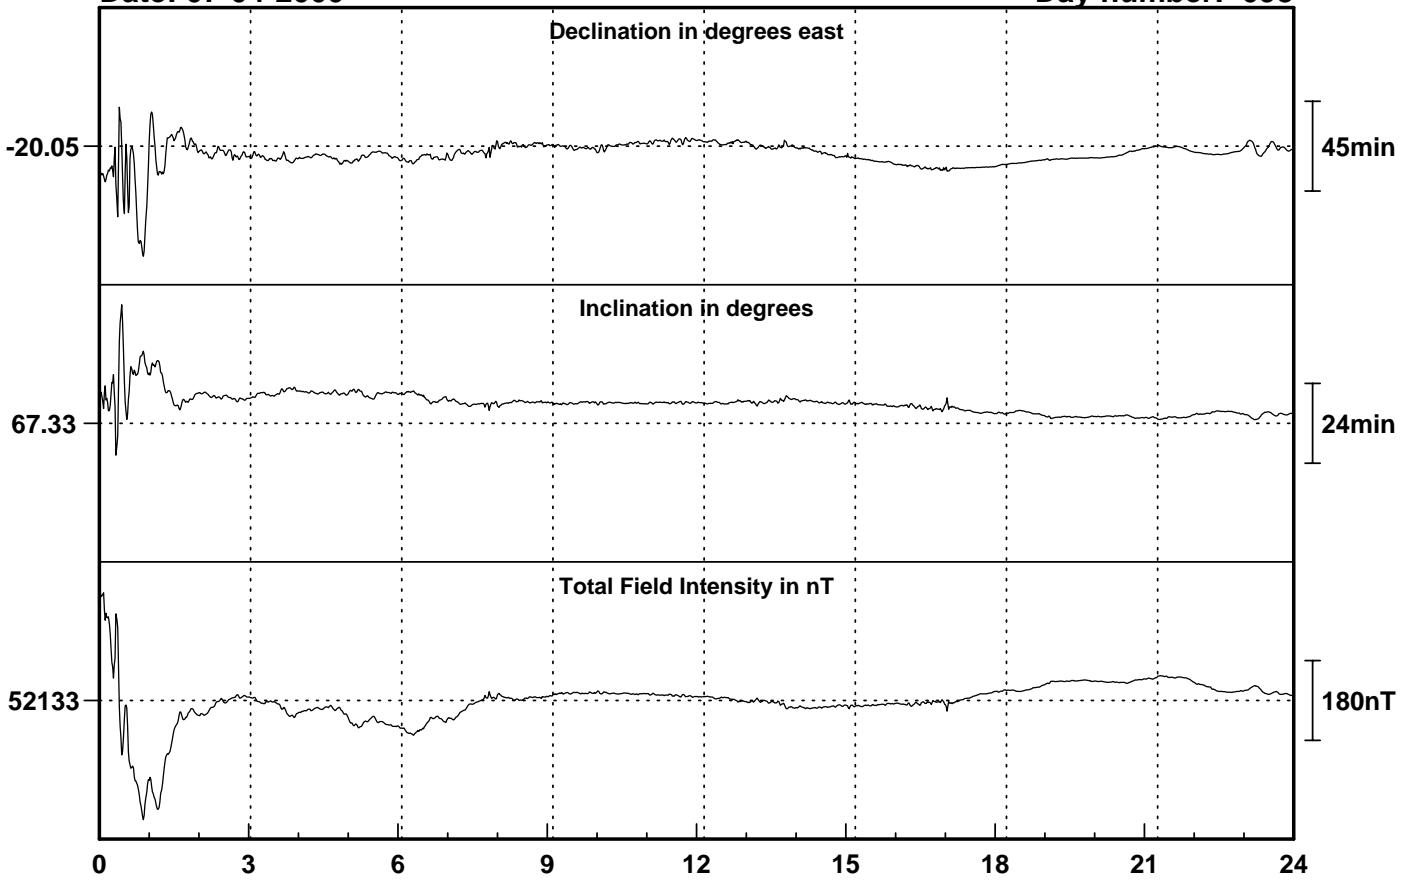

Date: 08-04-2000

Day number: 099

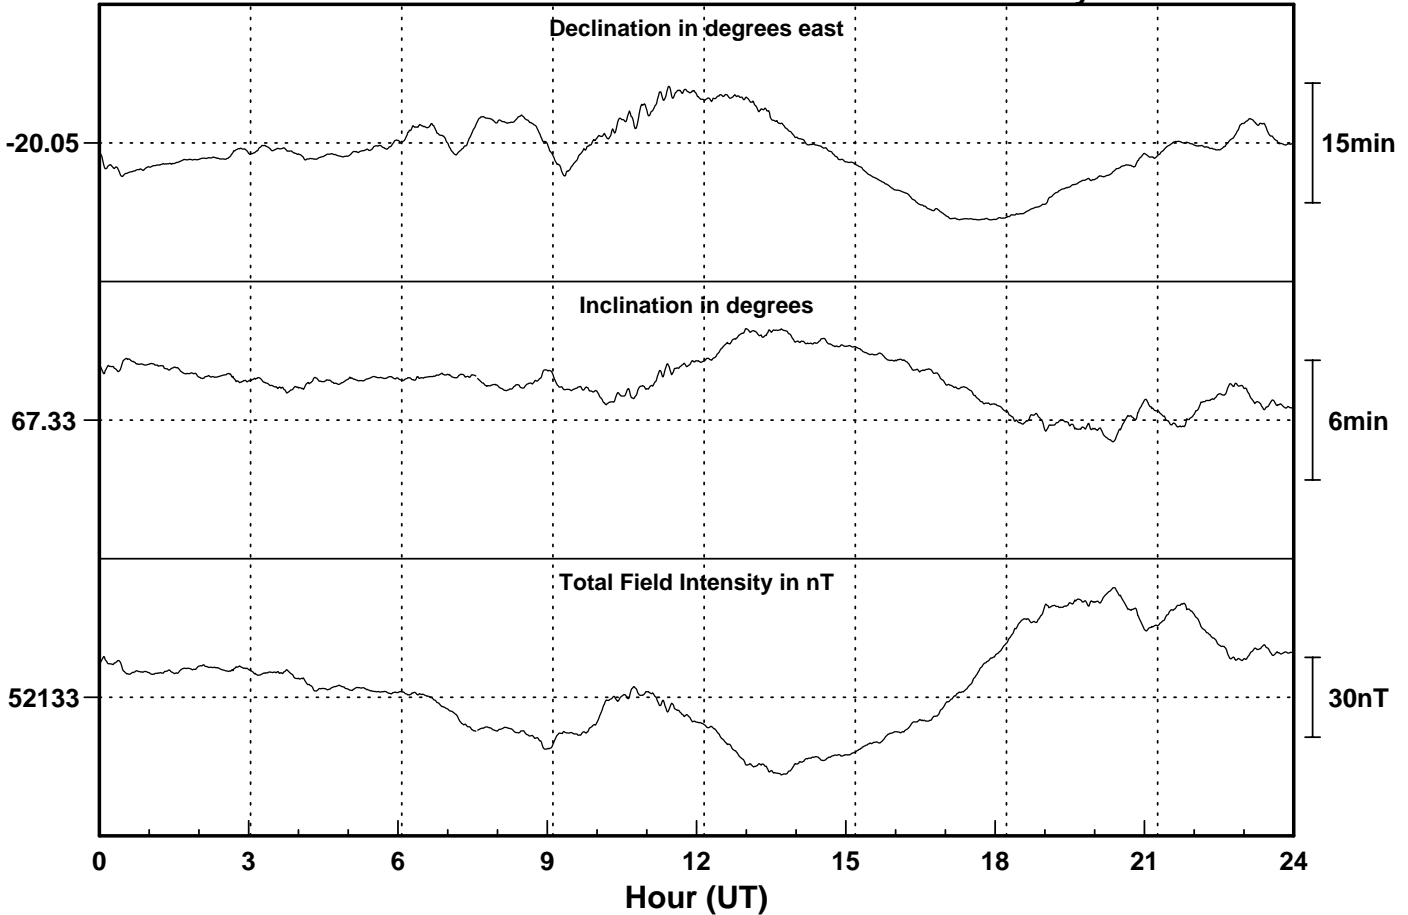




Date: 09-04-2000


# Sable Island

Day number: 100

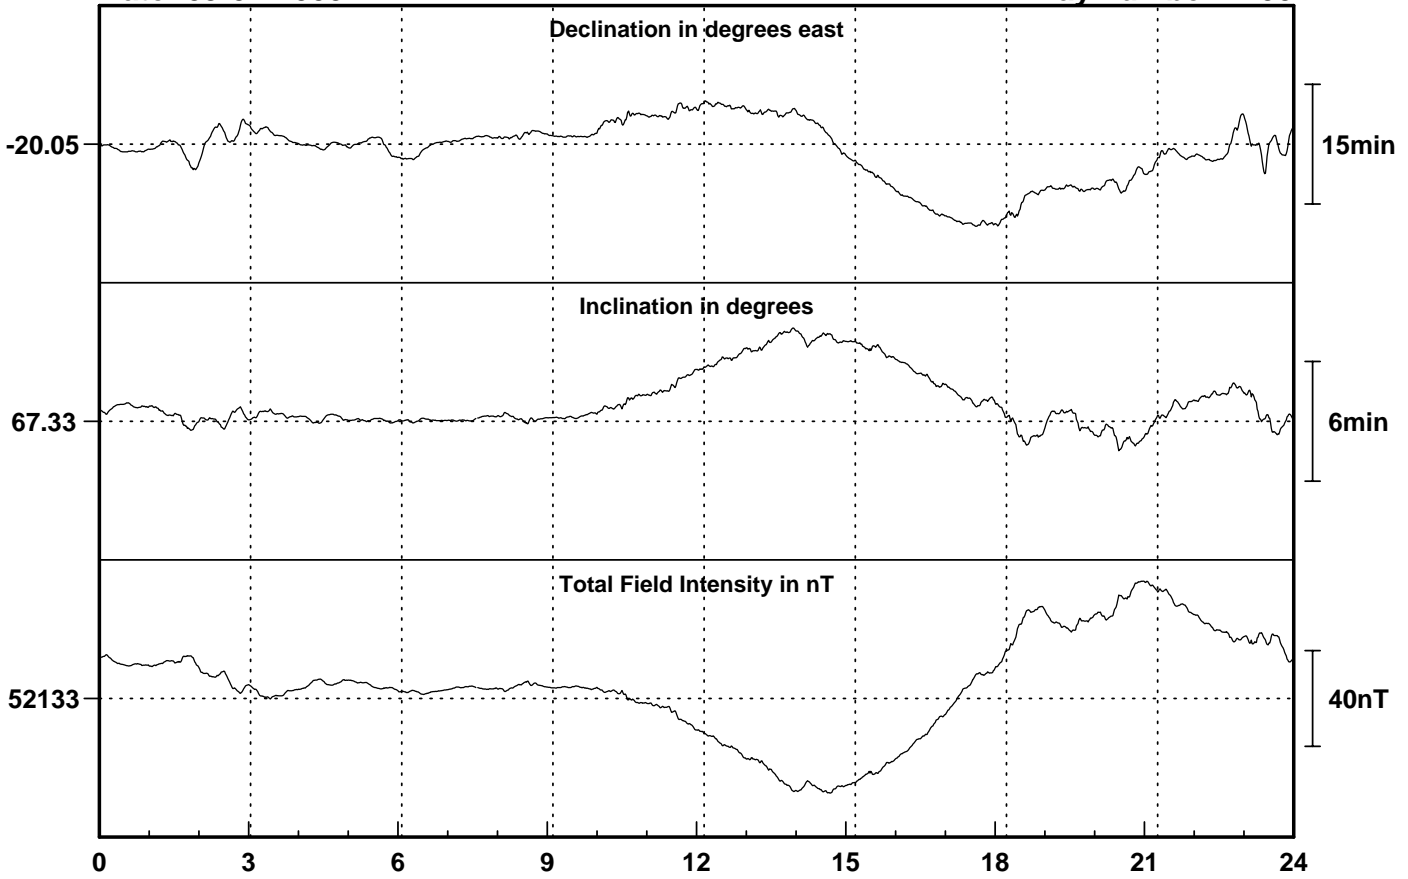

Date: 10-04-2000


Day number: 101

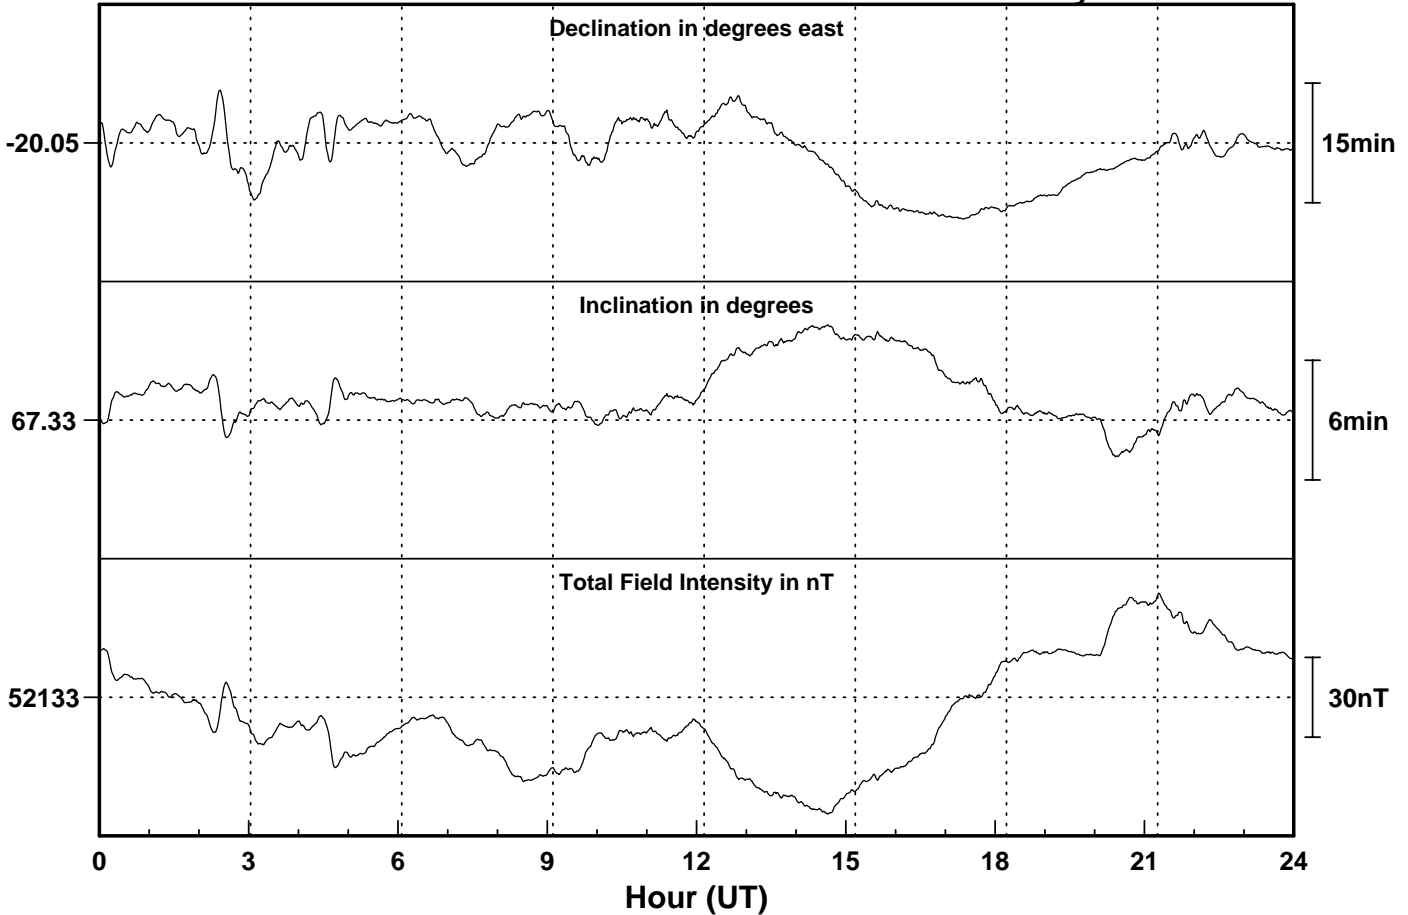

Date: 11-04-2000


### Sable Island

Day number: 102

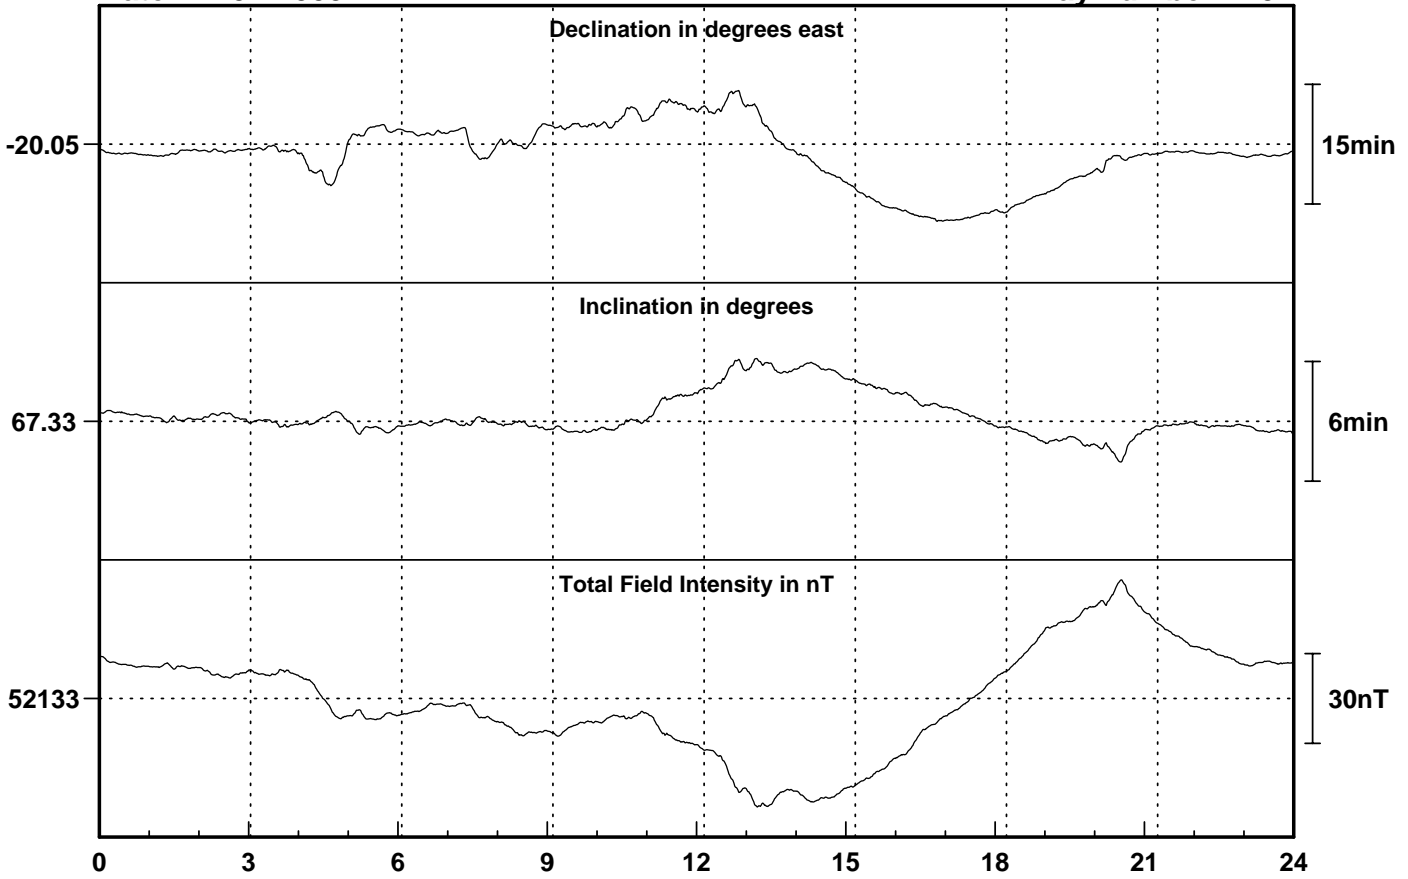

Date: 12-04-2000


Day number: 103

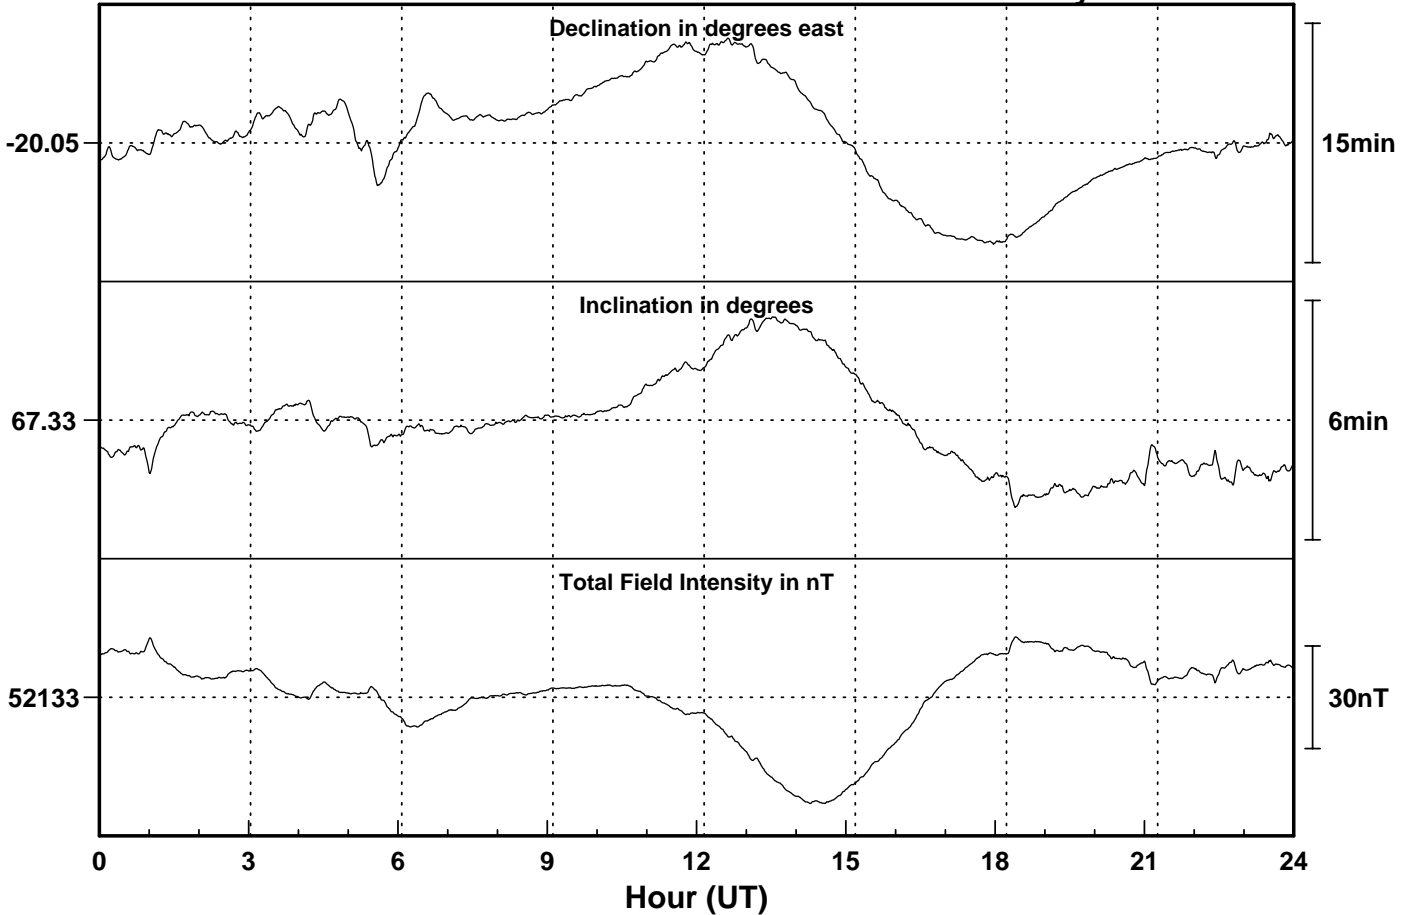

Date: 13-04-2000


### Sable Island

Day number: 104

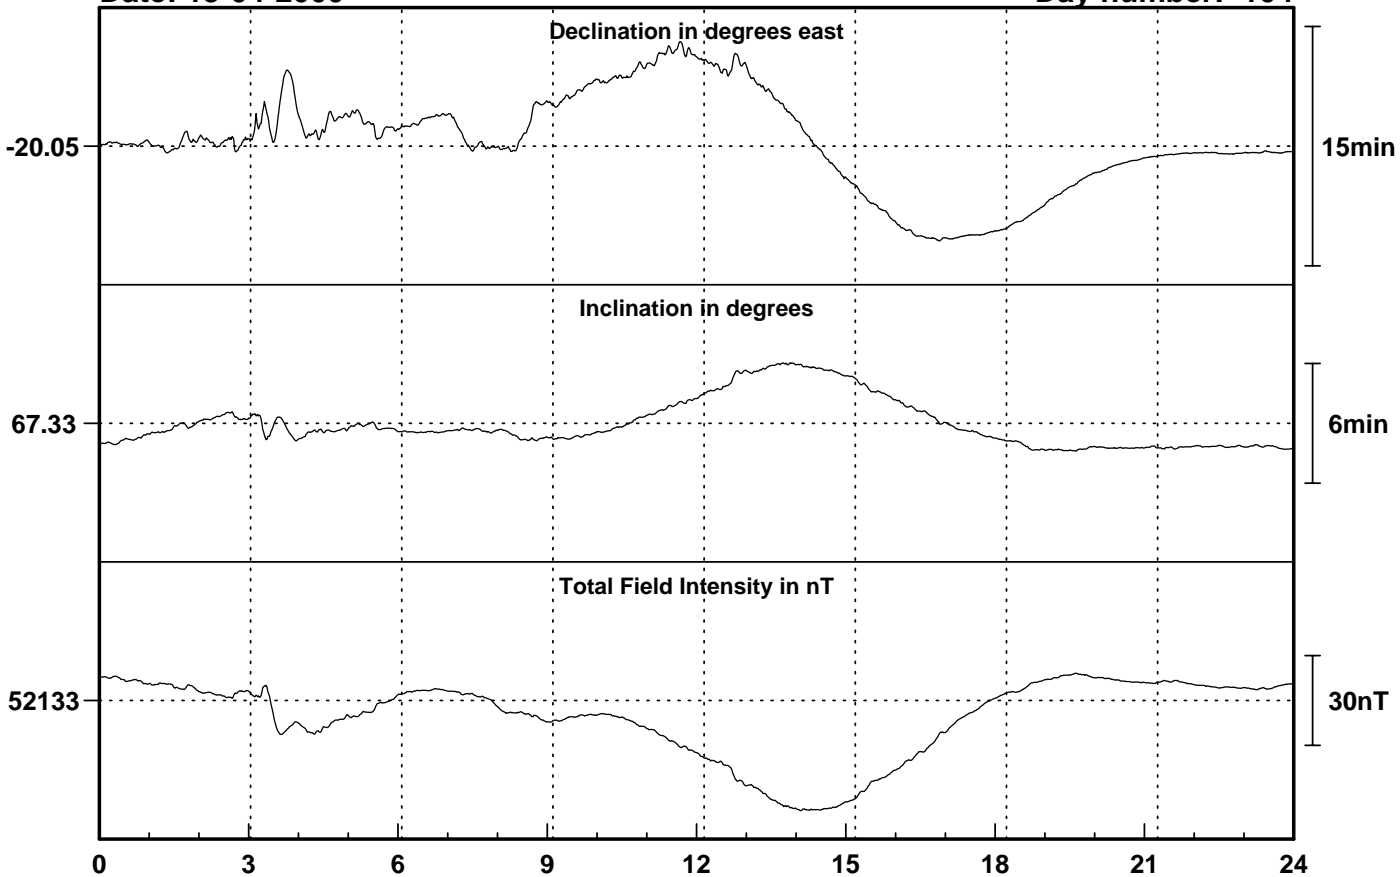

Date: 14-04-2000


Day number: 105

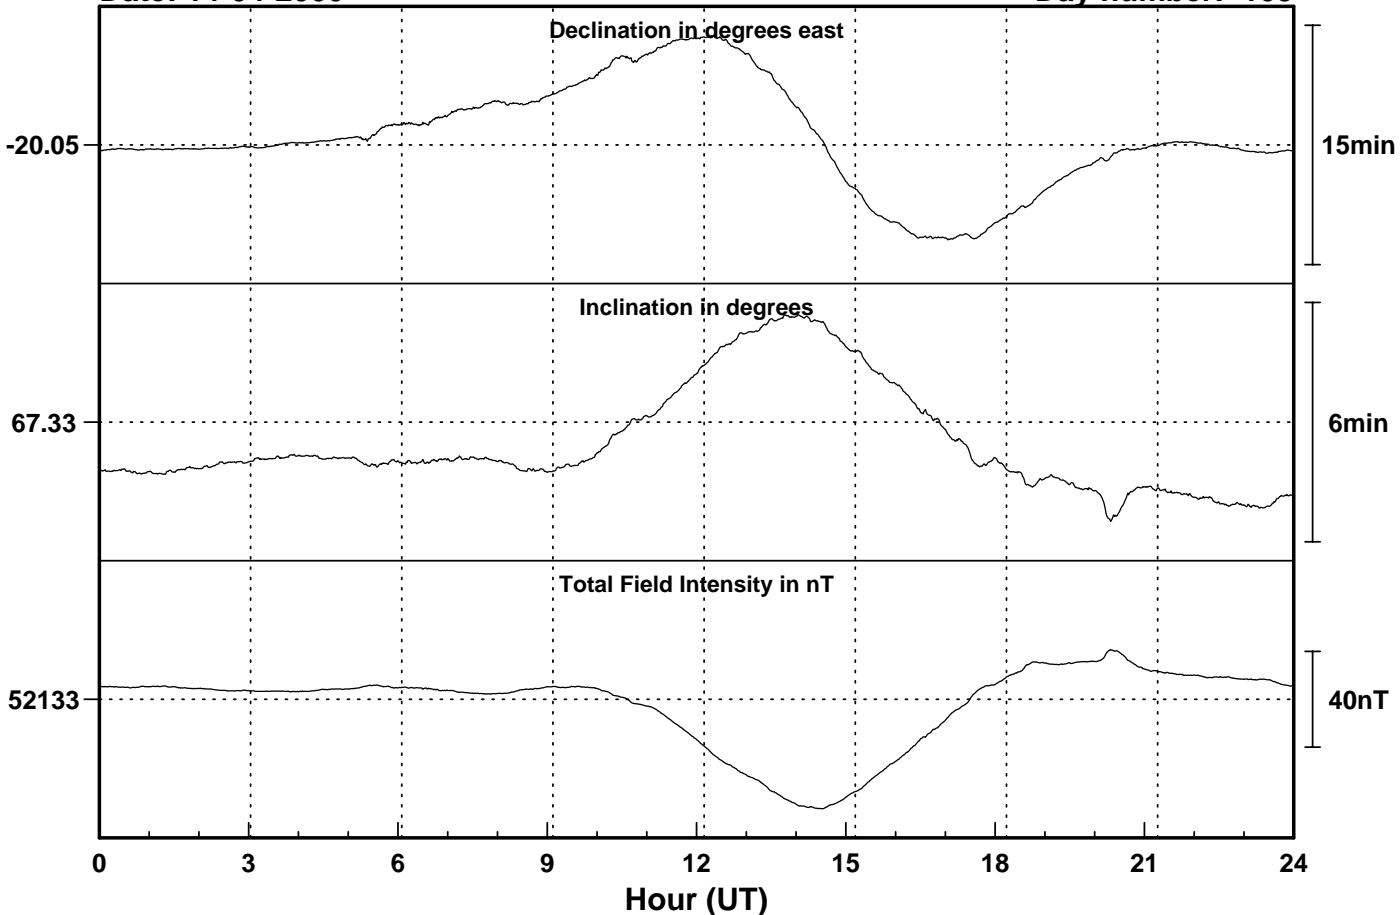

Date: 15-04-2000


### Sable Island

Day number: 106

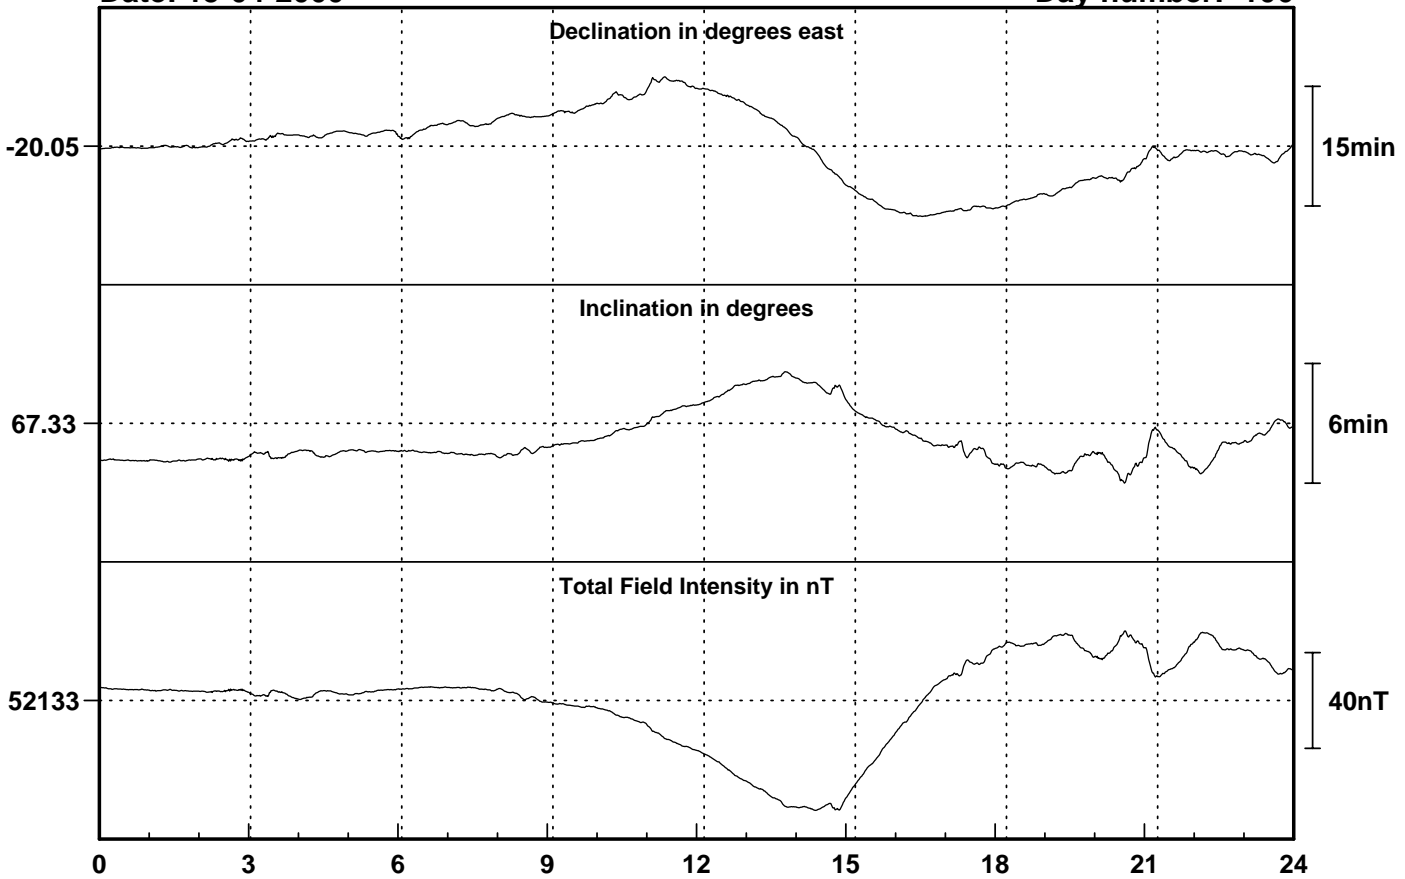

Date: 16-04-2000


Day number: 107

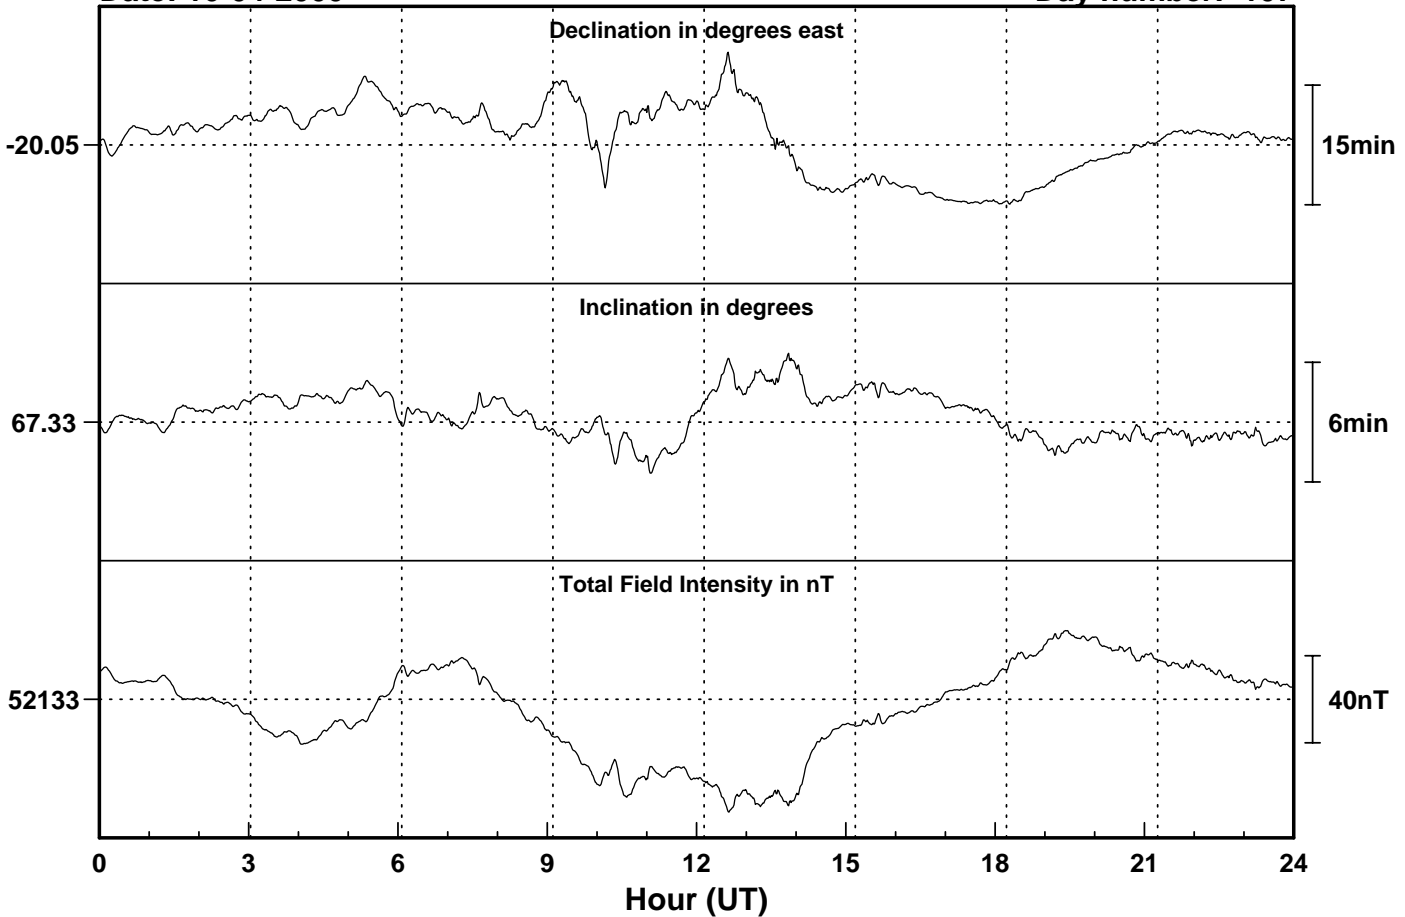

Date: 17-04-2000


### Sable Island

Day number: 108

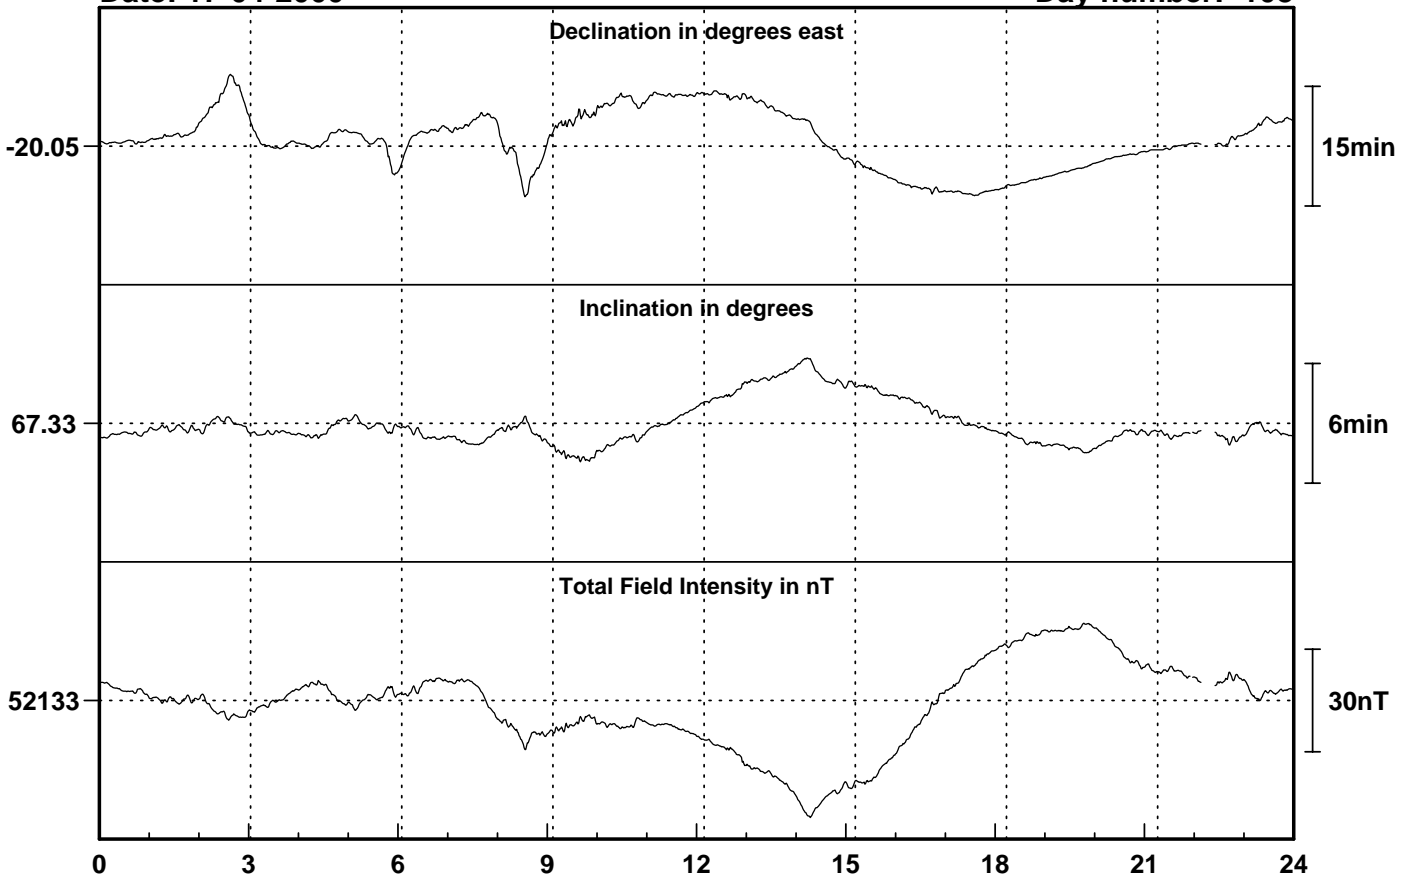

Date: 18-04-2000


Day number: 109

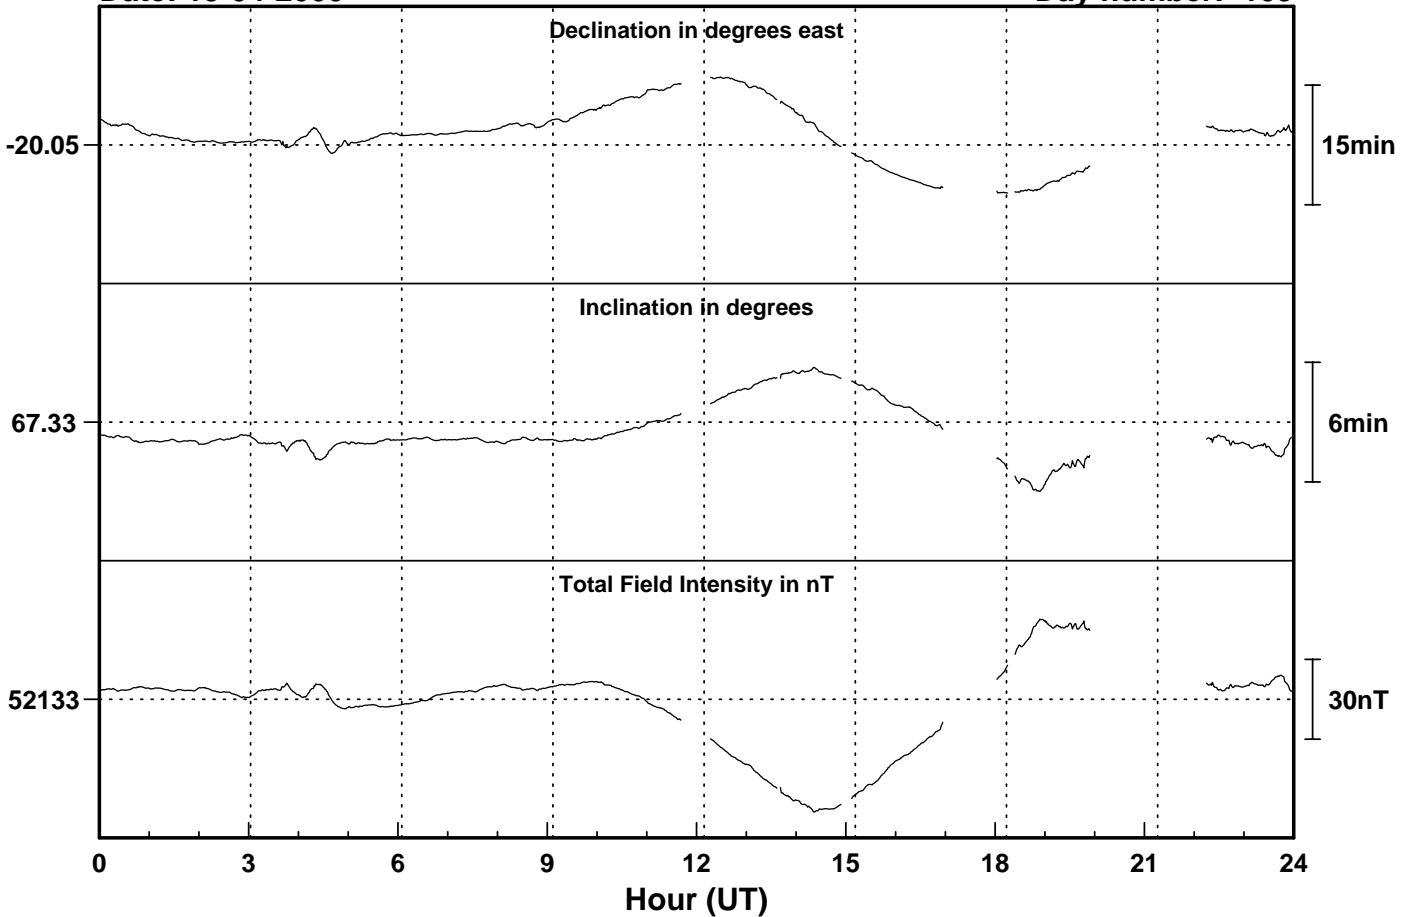

Date: 19-04-2000


# Sable Island

Day number: 110

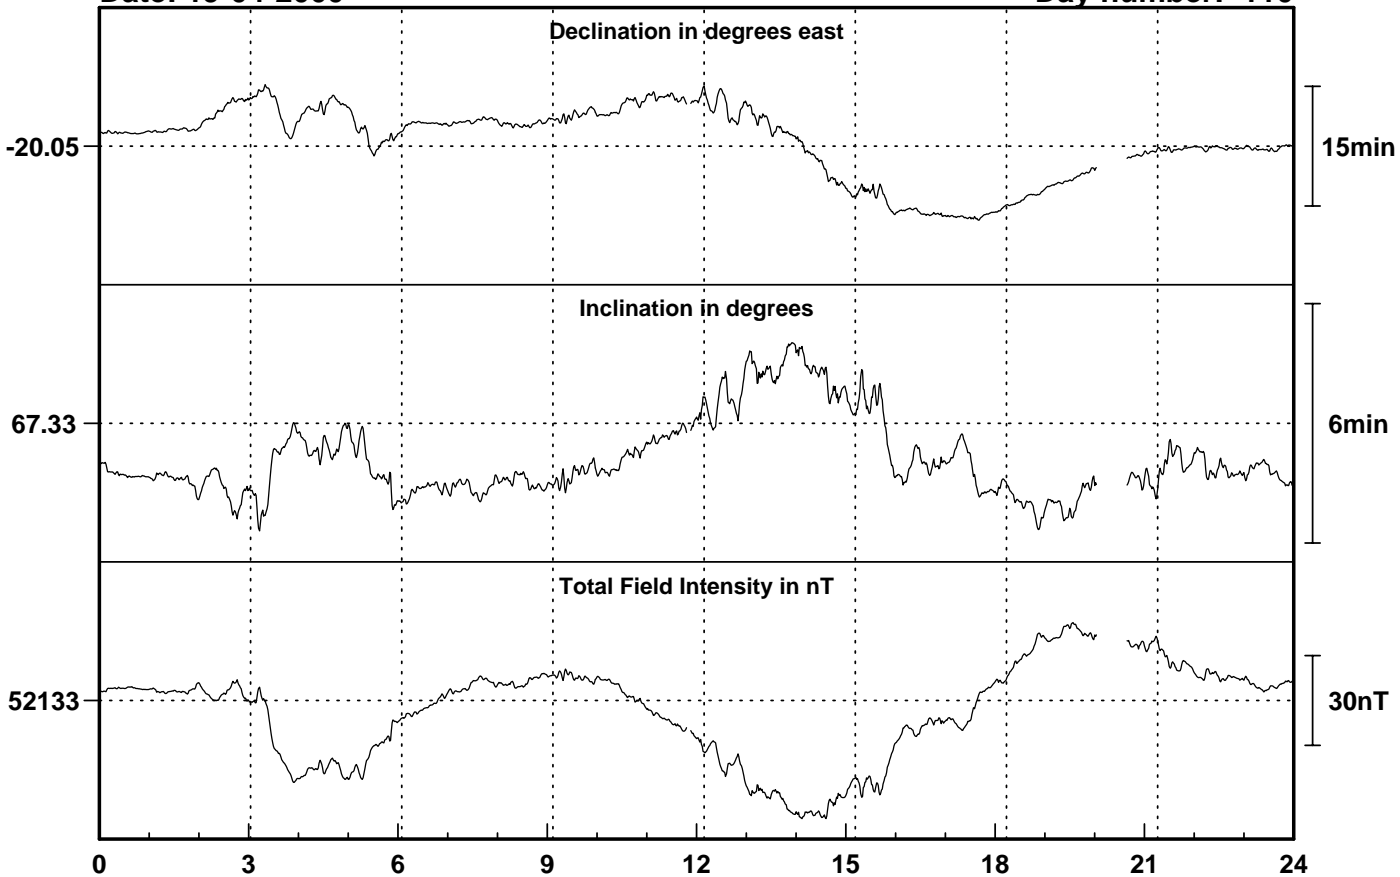

Date: 20-04-2000


Day number: 111

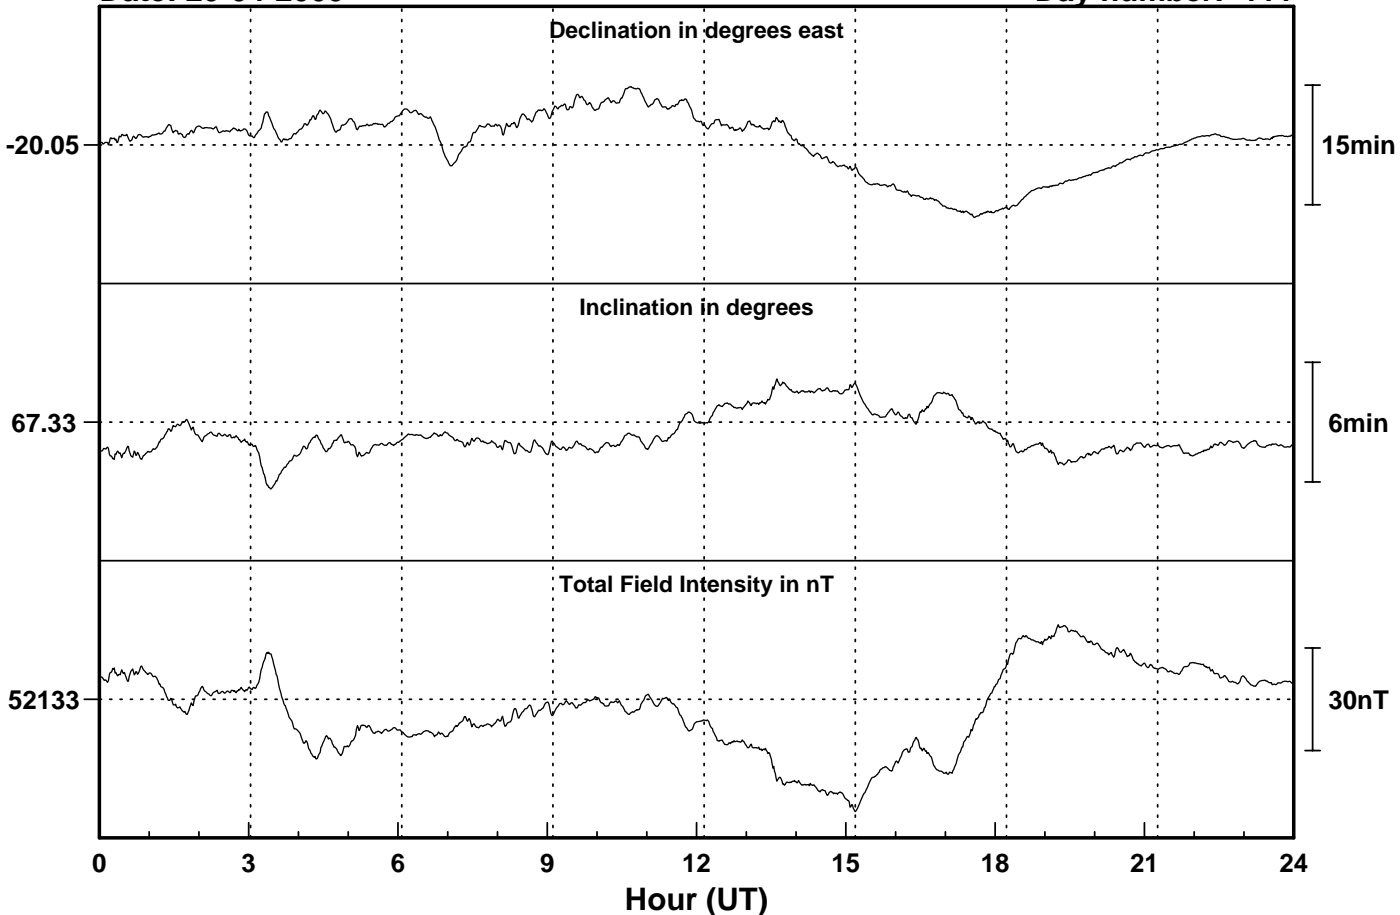

Date: 21-04-2000


### Sable Island

Day number: 112

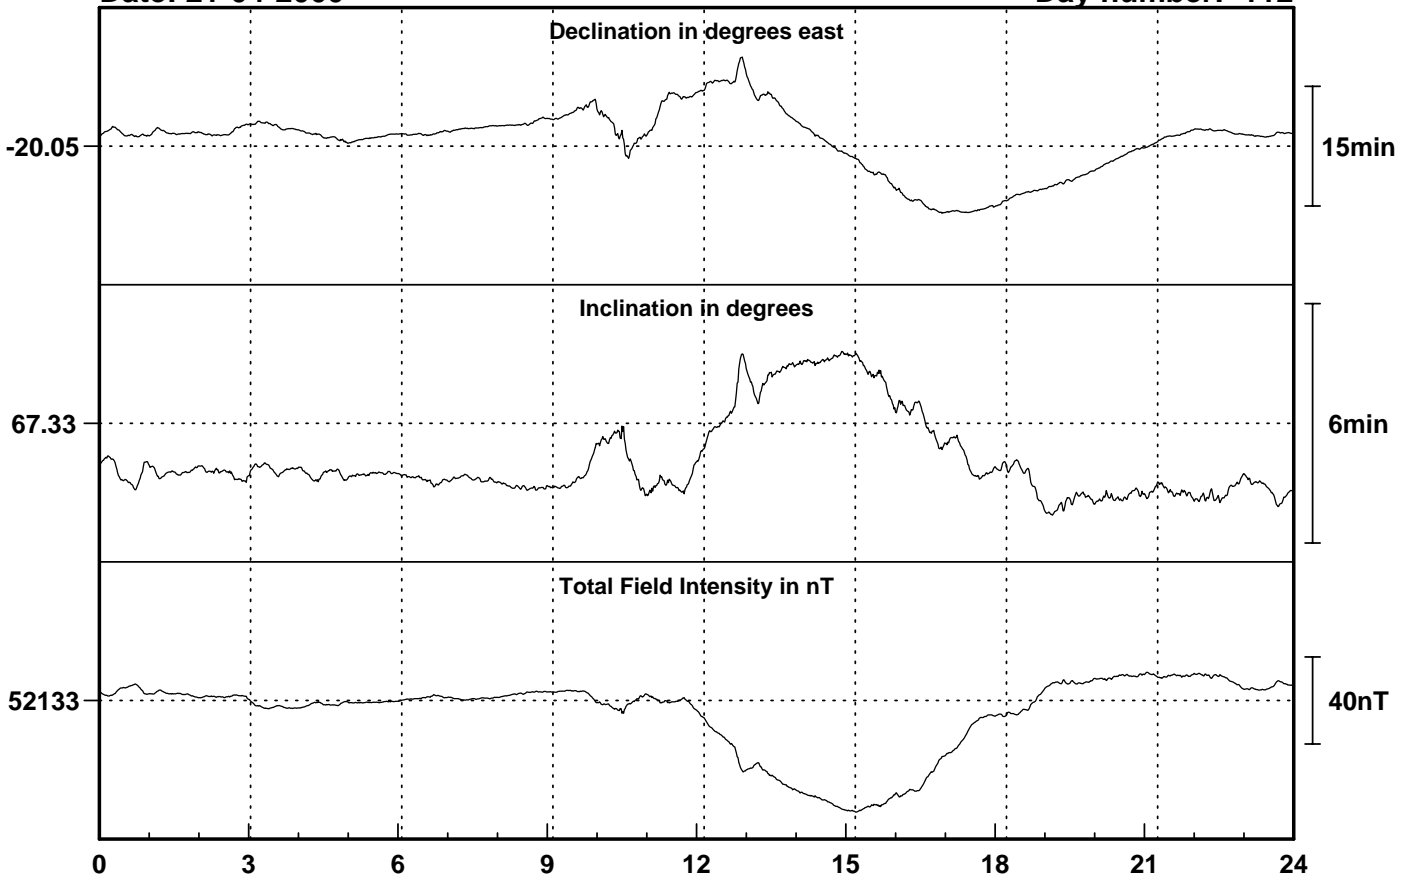

Date: 22-04-2000


Day number: 113

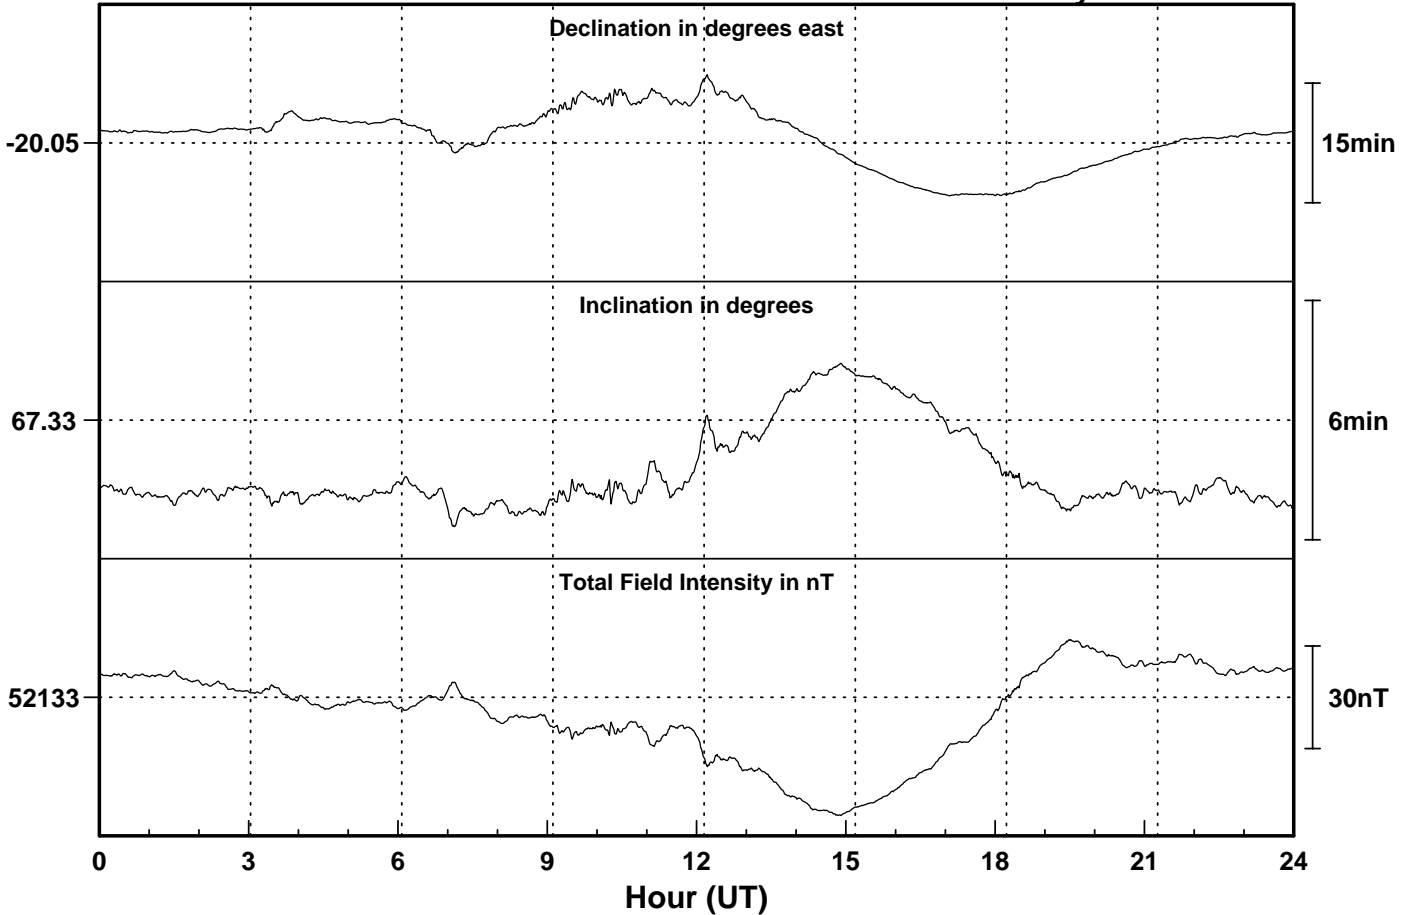

Date: 23-04-2000


### Sable Island

Day number: 114

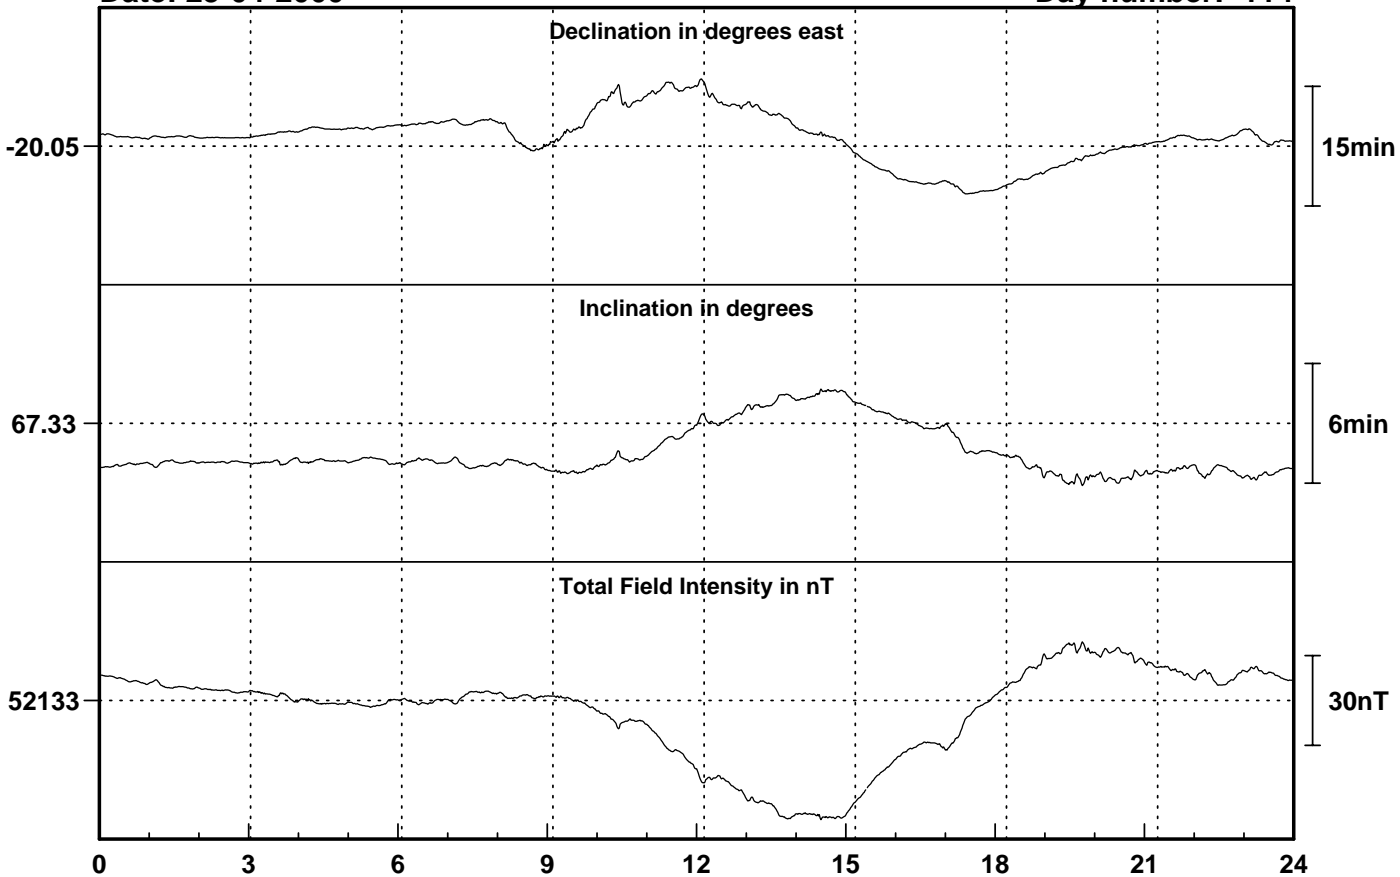

Date: 24-04-2000

Day number: 115

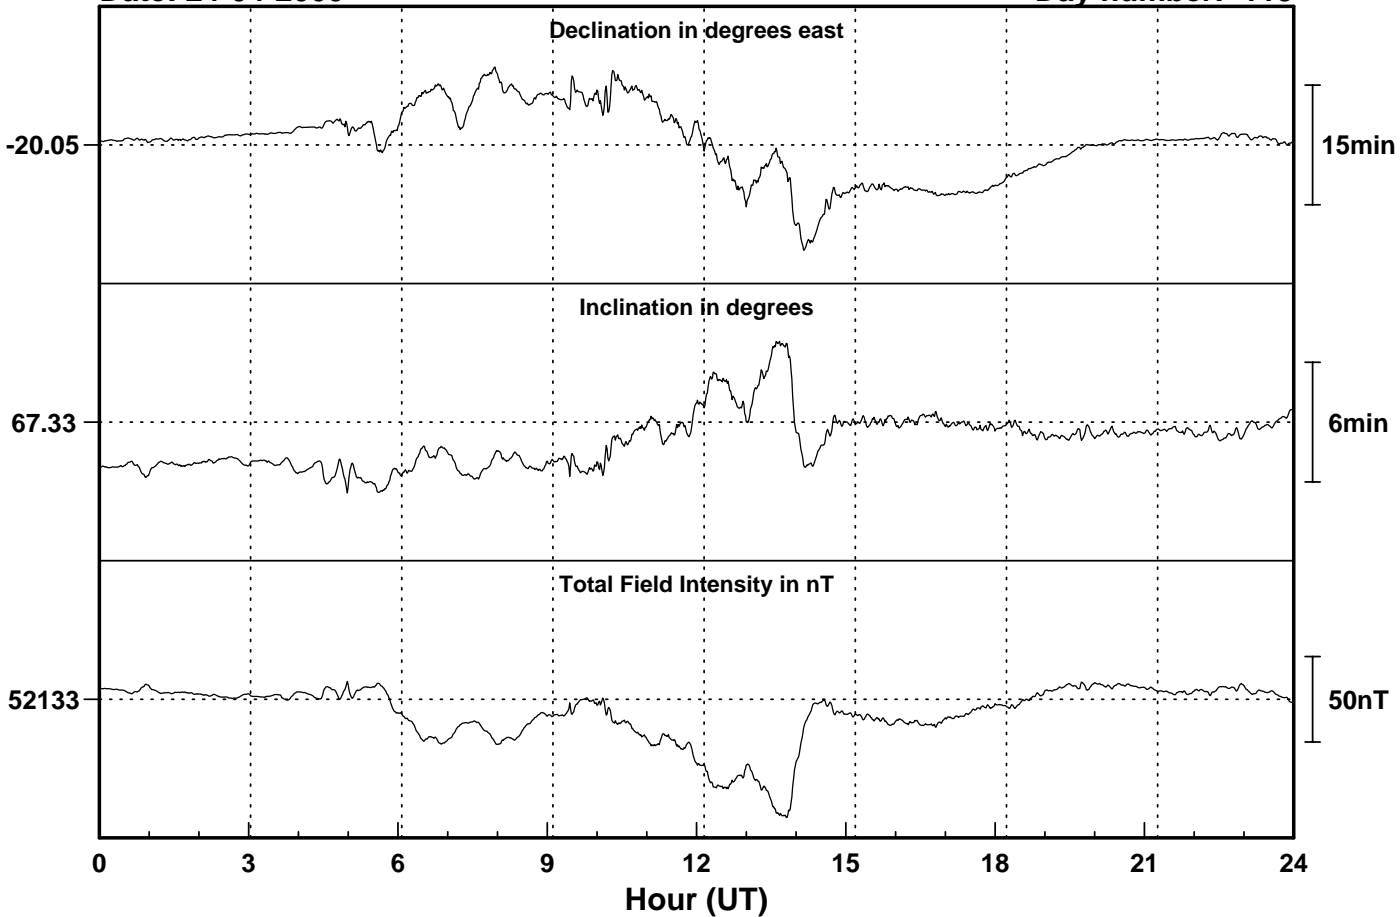




Date: 25-04-2000


### Sable Island

Day number: 116

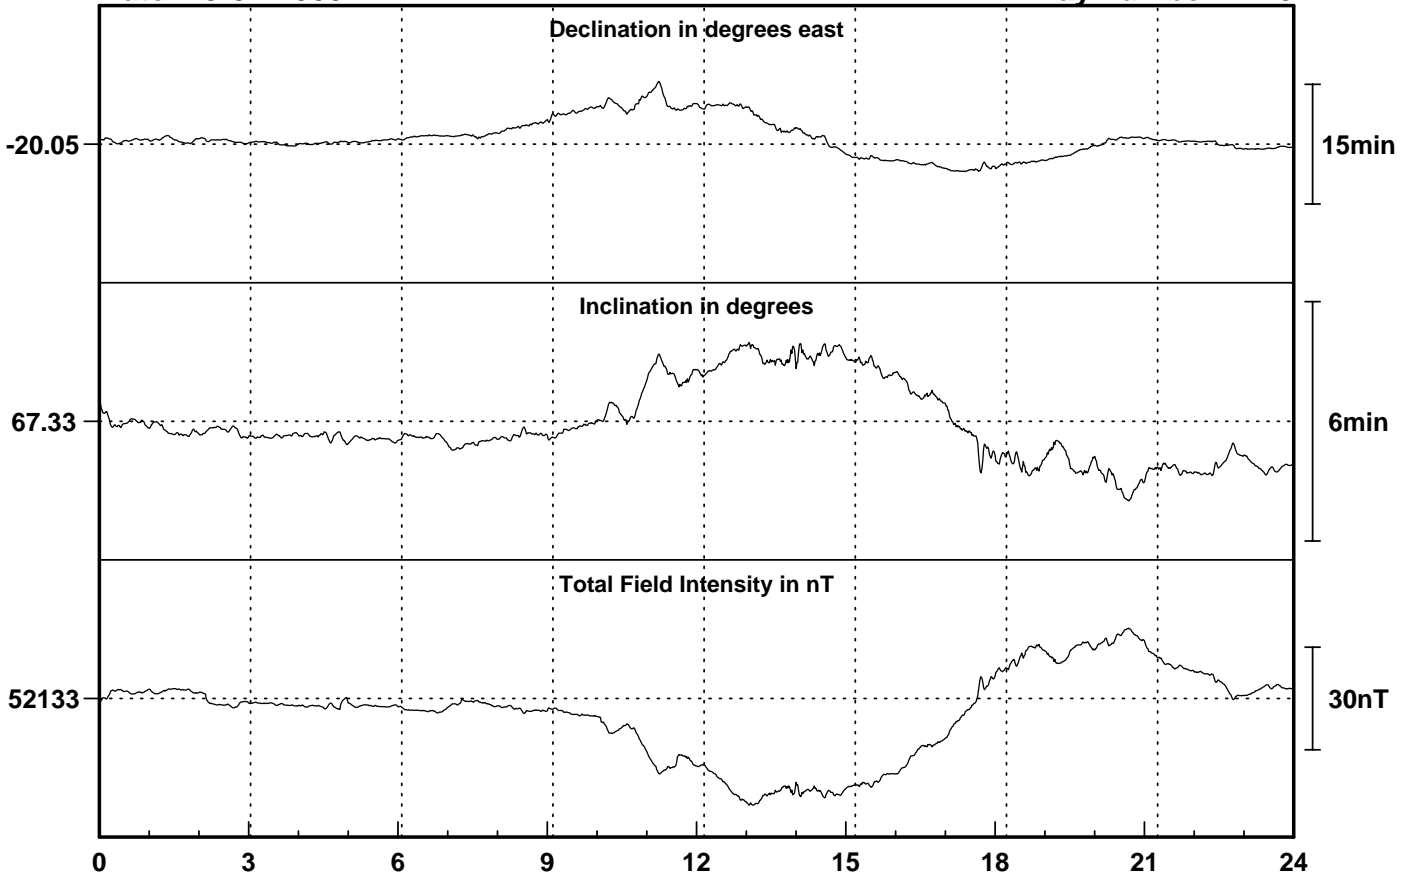

Date: 26-04-2000


Day number: 117

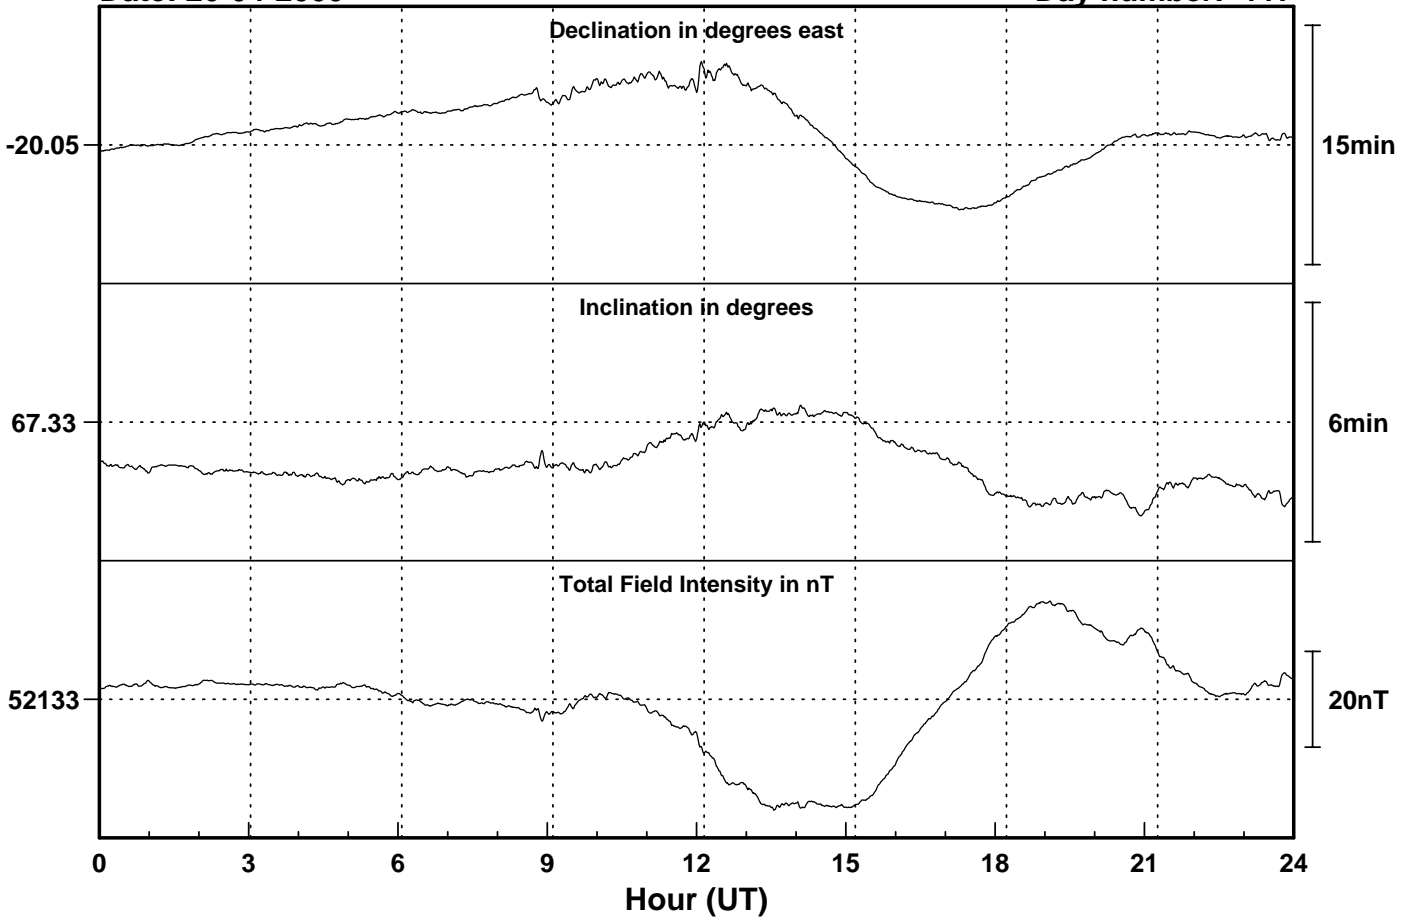

Date: 27-04-2000


### Sable Island

Day number: 118

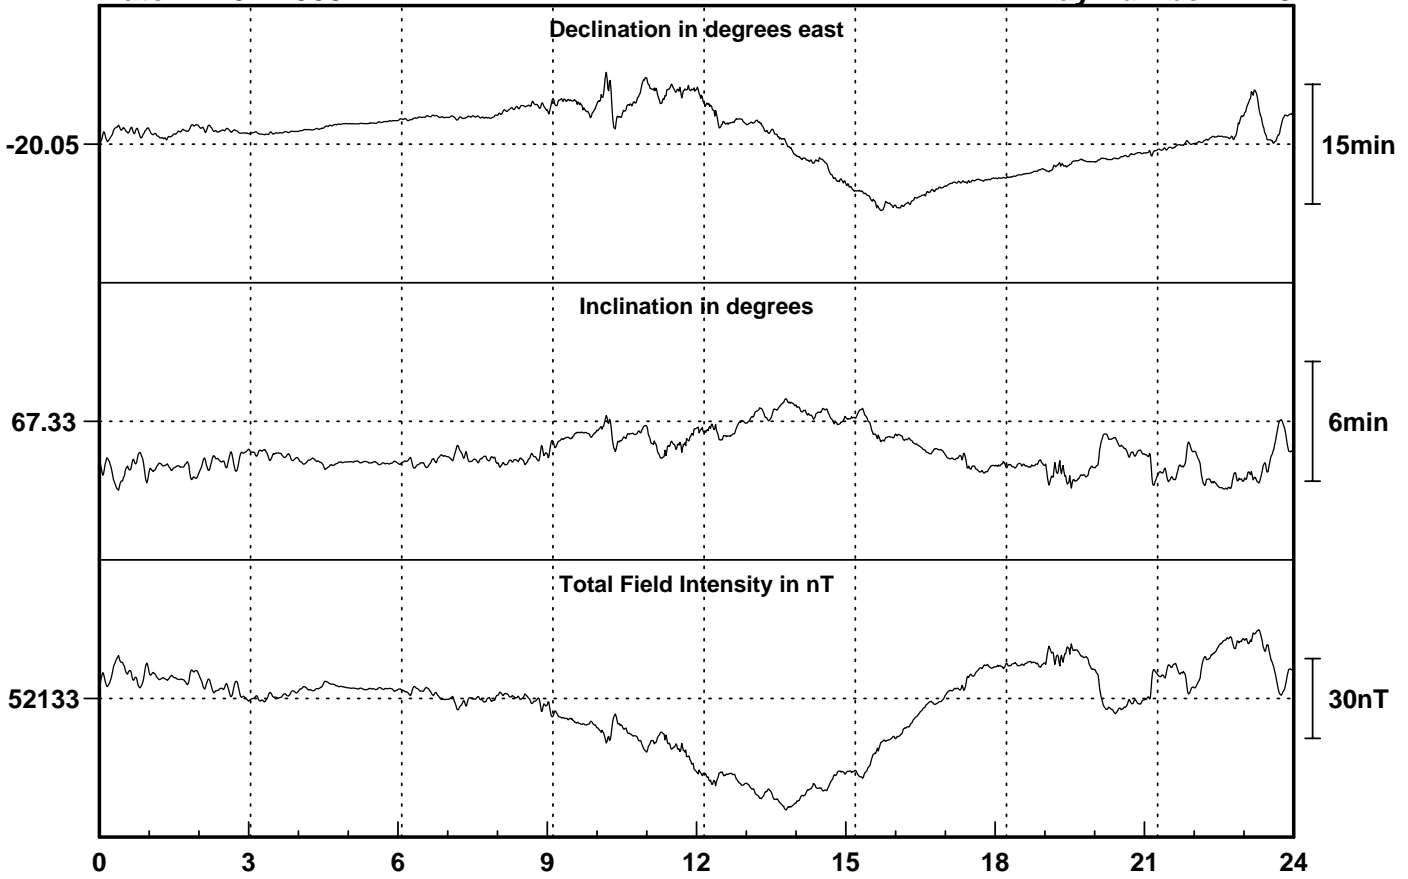

Date: 28-04-2000


Day number: 119

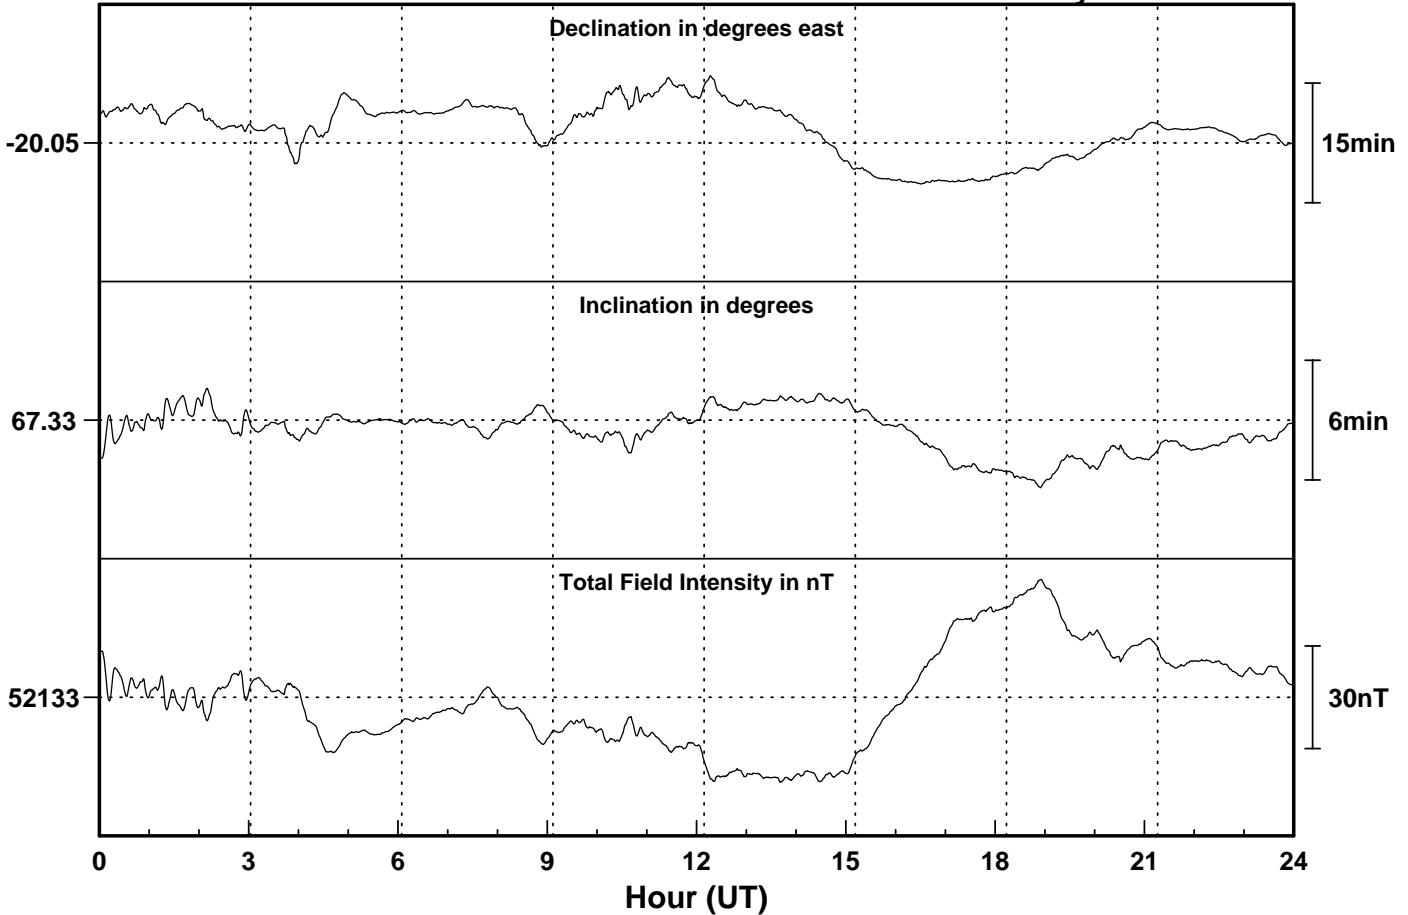

Date: 29-04-2000


### Sable Island

Day number: 120

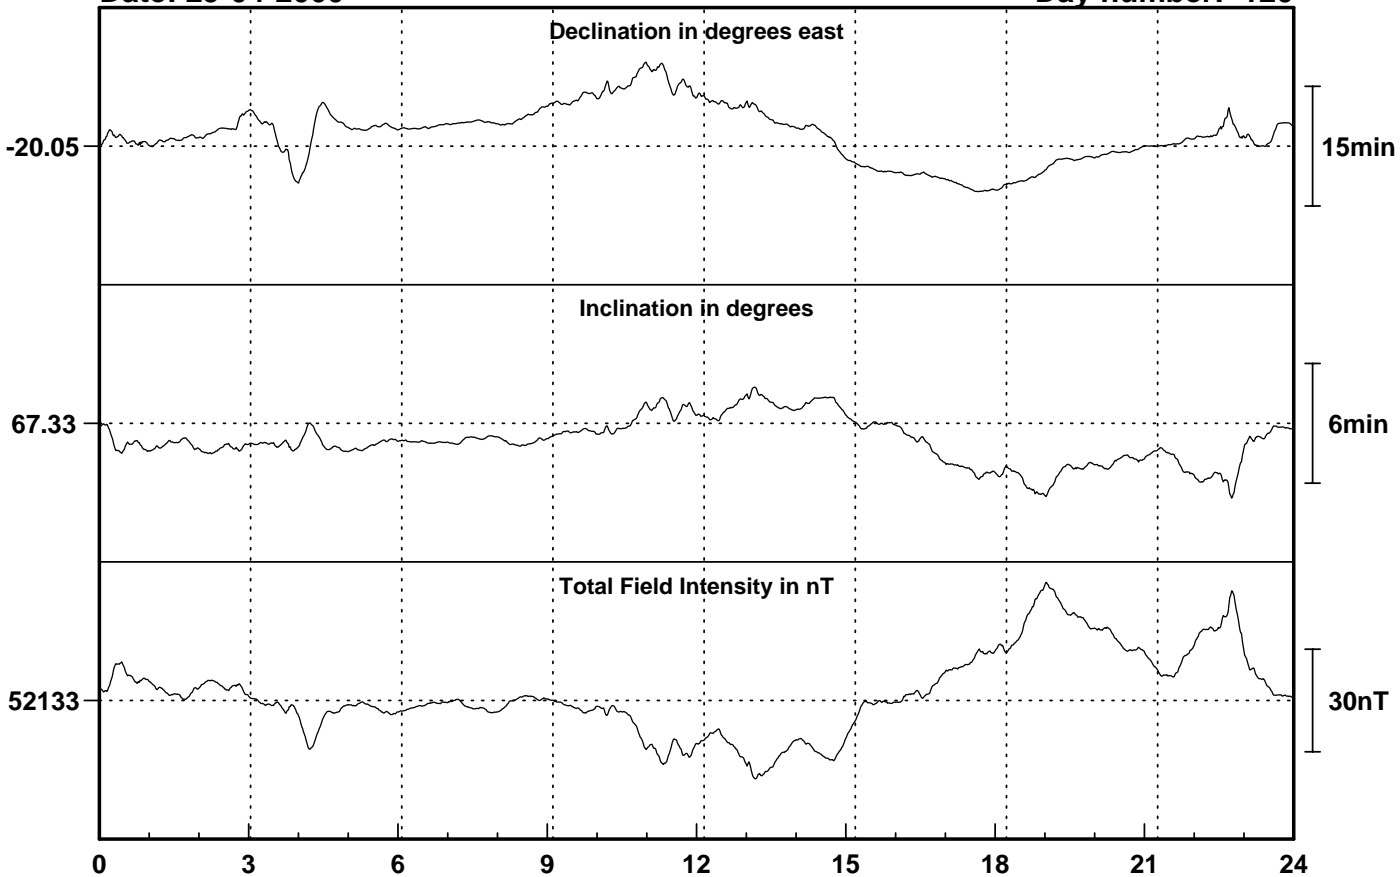


Date: 30-04-2000

Day number: 121

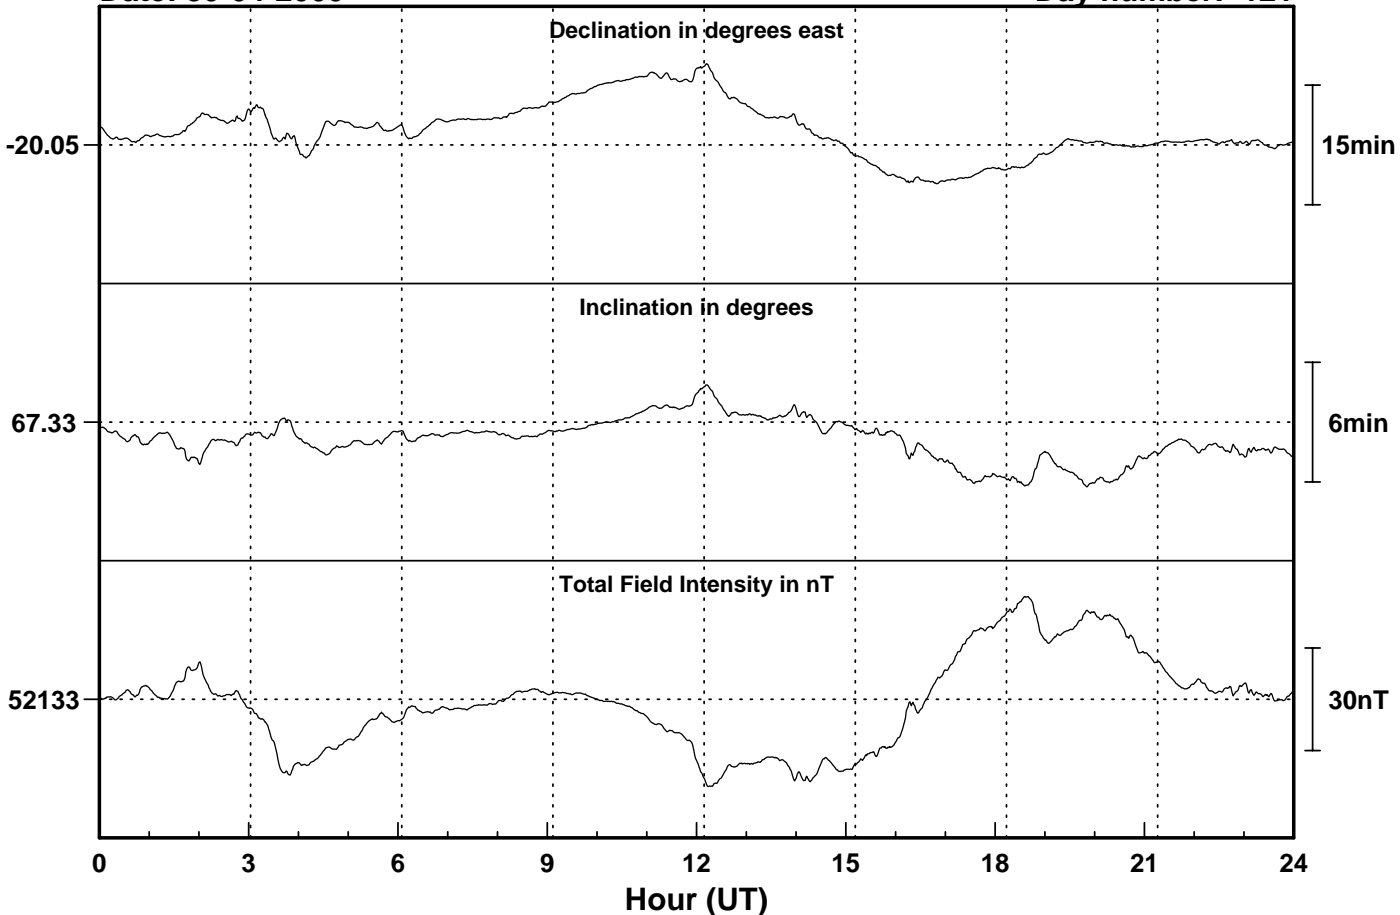



# Sable Island Daily Mean Values 2000

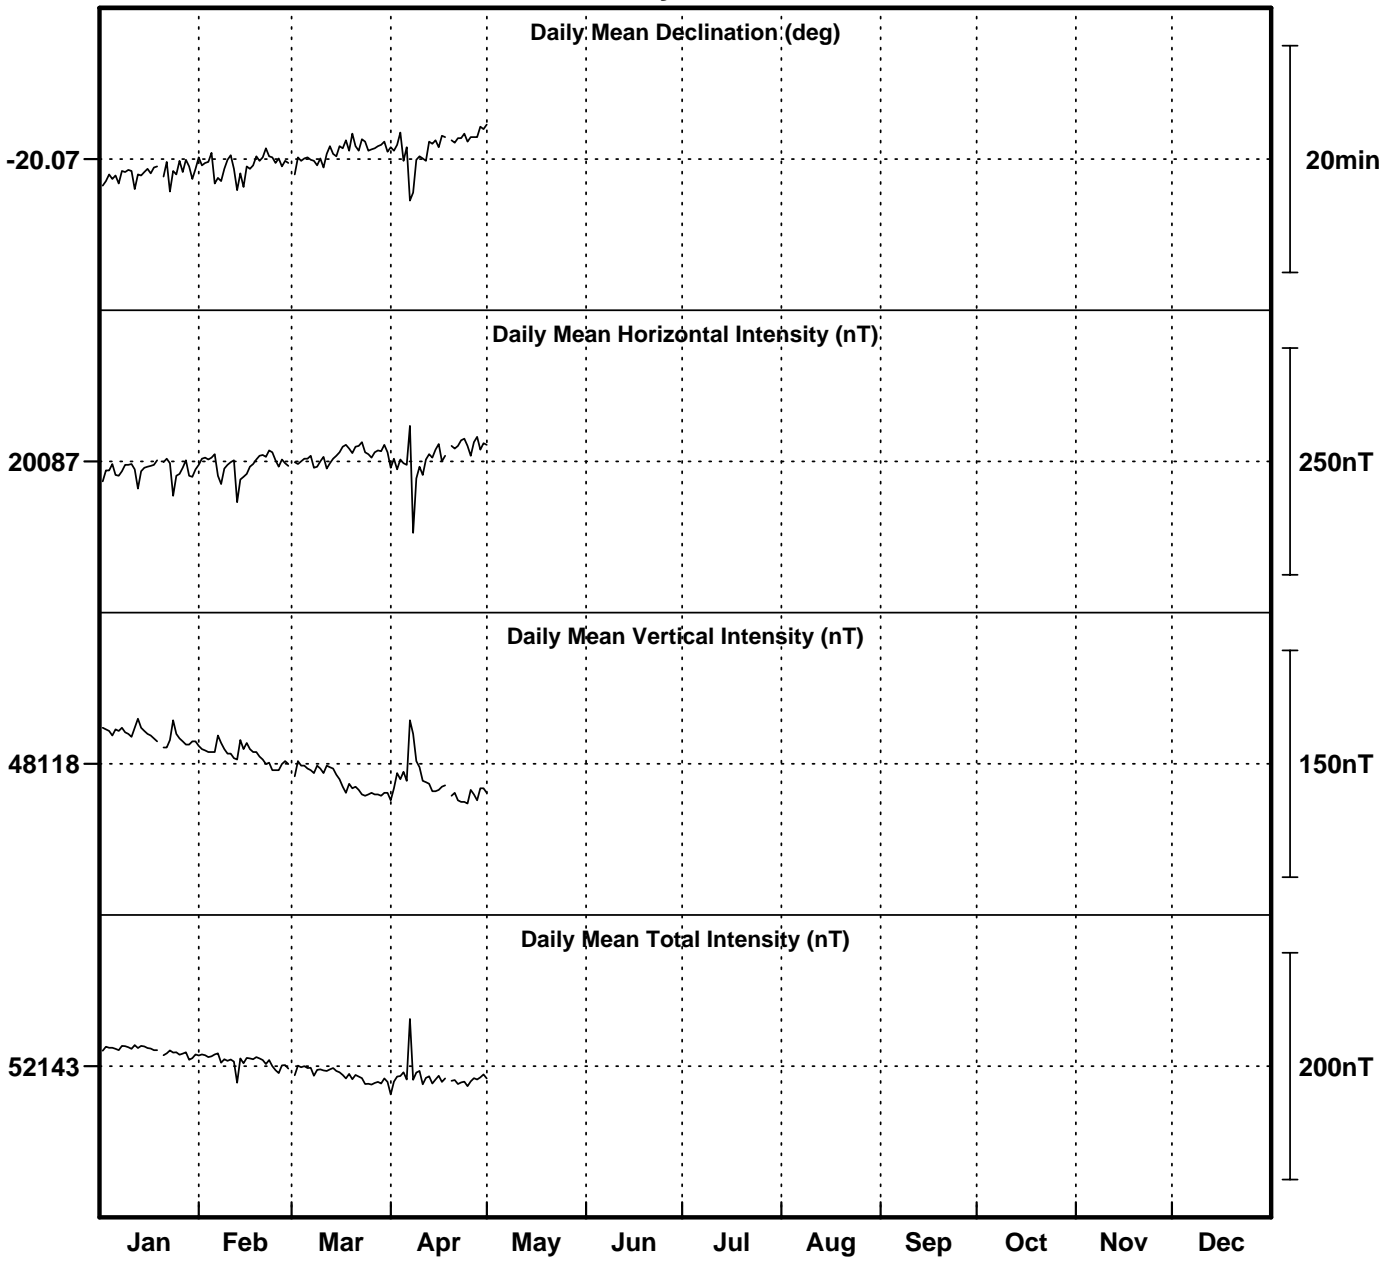

### Monthly Mean Values for Sable Island Observatory 2000

Month	<i>D</i>	<i>H</i>	<i>I</i>	<i>X</i>	<i>Y</i>	<i>Z</i>	<i>F</i>	Data
January	-20° 5.6′	20077 nT	67° 21.6′	18855 nT	-6897 nT	48137 nT	52156 nT	<b>P</b>
February	-20° 4.9′	20083 nT	67° 20.9′	18862 nT	-6896 nT	48124 nT	52147 nT	<b>P</b>
March	-20° 3.7′	20093 nT	67° 19.8′	18874 nT	-6893 nT	48107 nT	52134 nT	<b>P</b>
April	-20° 3.2′	20093 nT	67° 19.8′	18875 nT	-6890 nT	48105 nT	52133 nT	<b>P</b>

## 2. OBSERVATORY OPERATION AND QUALITY CONTROL

### 2.1 The Observatory Operation.

#### 2.1.1 FLARE *Plus*

The observatory operates under the control of the Fluxgate Logging Automatic Recording Equipment incorporating a proton magnetometer (FLARE *Plus*), which was developed by BGS. The system is based on a PC, which controls the data-logging and communications. The measurements are made using two types of magnetometers: a triaxial linear-core fluxgate magnetometer manufactured by the Danish Meteorological Institute; and a Geomag SM90R Overhauser effect proton precession magnetometer (PPM). Two of the fluxgate sensors are orientated to measure the variations in  $H$  and  $Z$  and the third is orientated perpendicular to these and measures variations that are proportional to the changes in  $D$ . Measurements are made every 5 seconds and are filtered using a 19-point Gaussian filter to produce one-minute values centred at 0 seconds past the minute. The PPM is used to make measurements of  $F$  every minute, also at 0 seconds past the minute. Accurate timing of the data is established using GPS. The one-minute values are stored both in memory (up to 2 days) and on a floppy disk (up to 40 days). The FLARE *Plus* system is described in more detail by Turbitt *et al* (BGS Technical Report WM/97/16).

#### 2.1.2 Data Retrieval

The data are retrieved to the BGS office in Edinburgh by a modem connected to a dedicated collection PC. This calls a NERA Worldphone satellite modem, which is connected to the FLARE *Plus* system at the observatory. In normal operation this is performed automatically four times per day, but data can be retrieved on demand if required. A backup procedure of regularly changing the floppy disks and returning them to Edinburgh by post is also carried out.

### 2.2 Absolute Observations

The fluxgate magnetometers are designed to accurately monitor the variations in the components of the geomagnetic field. They do not measure the absolute magnitudes of the components. Absolute measurements of the field are made typically once a week, and are tabulated in this bulletin. A fluxgate sensor (Bartington MAG-01H) mounted on a non-magnetic theodolite (Carl Zeiss 010B) is used to determine  $D$  and  $I$ ;  $F$  values are obtained from the PPM. The absolute observations are used in conjunction with the FLARE *Plus* variometer measurements to produce a continuous record of the absolute values of the geomagnetic field elements as

if they had been measured at the observatory reference pillar.

### 2.3 Quality Control

#### 2.3.1 $F$ Differences and Baselines

A plot of the differences between the absolute observations and the variometer measurements of  $D$ ,  $H$  and  $Z$  throughout the year is shown along with the derived baseline values (Fig 1). These daily values have been added to the variations to derive the quasi-absolute values of  $D$ ,  $H$  and  $Z$ . Daily mean differences between the measured absolute  $F$  and the  $F$  computed from the final  $H$  and  $Z$  values are also shown on this plot. The  $F$  comparisons are also presented as hourly mean differences during the month (Fig 2). The hourly means of the temperature inside the variometer room throughout the month are displayed in the second panel of this plot.

#### 2.3.2 Collimation Errors

In an ideal fluxgate-theodolite the magnetic axis of the sensor core would be parallel to the optical axis of the telescope. However, this situation is impossible to achieve and small alignment errors called collimation errors are the result. These are systematic errors and should remain roughly constant. With the telescope horizontal,  $d$  is the collimation error about the vertical axis and  $e$  is the collimation error about the horizontal axis, both expressed as angles. A third error, measured in nT, is the zero-field offset,  $Z_0$ . This represents the output if the instrument was placed in a zero field and is due to permanent magnetisation of the core or to features of the electronics. The collimation and zero-field offset values for throughout the year are plotted (Fig 3) to check that they do remain reasonably constant. Departures from a long-term mean value may be caused by changes to the fluxgate-theodolite or by errors in recording the measurements, and so monitoring the collimation errors is a means of quality control.

#### 2.3.3 Diary and FLARE *plus* reliability

A narrative describing work carried out at the observatory during the month and any effects on the data collected is given in the diary. If known, the reasons for any data loss are described.

The reliability of the system is constantly monitored. The times of any failure which resulted in loss or corruption of data are tabulated.

**SABLE ISLAND OBSERVATORY ABSOLUTE OBSERVATIONS**

	<b>Date</b>	<b>Day</b>	<b>Time (UT)</b>	<b>Value</b>
<b>Declination (fluxgate theodolite)</b>	17-04-00	108	19:35	-20° 06' 07"
		108	20:00	-20° 05' 15"
		108	20:54	-20° 03' 59"
	19-04-00	110	13:01	-19° 58' 05"
		110	13:24	-19° 59' 49"
	20-04-00	111	11:25	-19° 58' 48"
		111	11:51	-19° 58' 26"
	21-04-00	112	10:21	-20° 00' 54"
112		10:44	-20° 02' 56"	
<b>Inclination (fluxgate theodolite)</b>	17-04-00	108	19:48	67° 18' 20"
		108	20:11	67° 18' 55"
		108	21:09	67° 19' 24"
	19-04-00	110	13:13	67° 21' 11"
		110	13:35	67° 20' 53"
	20-04-00	111	11:37	67° 19' 34"
		111	12:03	67° 19' 47"
	21-04-00	112	10:33	67° 19' 26"
112		10:55	67° 18' 04"	
<b>Total Field Intensity (PPM)</b>	17-04-00	108	19:48	52156.6 nT
		108	20:11	52153.4 nT
		108	21:09	52143.4 nT
	19-04-00	110	13:13	52102.7 nT
		110	13:35	52102.8 nT
	20-04-00	111	11:37	52130.8 nT
		111	12:03	52128.4 nT
	21-04-00	112	10:33	52128.6 nT
112		10:55	52135.2 nT	
<b>Horizontal Intensity (fluxgate theodolite and PPM)</b>	17-04-00	108	19:48	20122.6 nT
		108	20:11	20113.8 nT
		108	21:09	20102.7 nT
	19-04-00	110	13:13	20062.5 nT
		110	13:35	20066.5 nT
	20-04-00	111	11:37	20095.4 nT
		111	12:03	20091.6 nT
	21-04-00	112	10:33	20096.4 nT
112		10:55	20118.6 nT	
<b>Vertical Intensity (fluxgate theodolite and PPM)</b>	17-04-00	108	19:48	48118.5 nT
		108	20:11	48118.7 nT
		108	21:09	48112.5 nT
	19-04-00	110	13:13	48085.3 nT
		110	13:35	48083.7 nT
	20-04-00	111	11:37	48101.9 nT
		111	12:03	48100.8 nT
	21-04-00	112	10:33	48099.1 nT
112		10:55	48097.0 nT	



**Figure 1 : Sable Island Baseline Values and F Comparisons 2000**

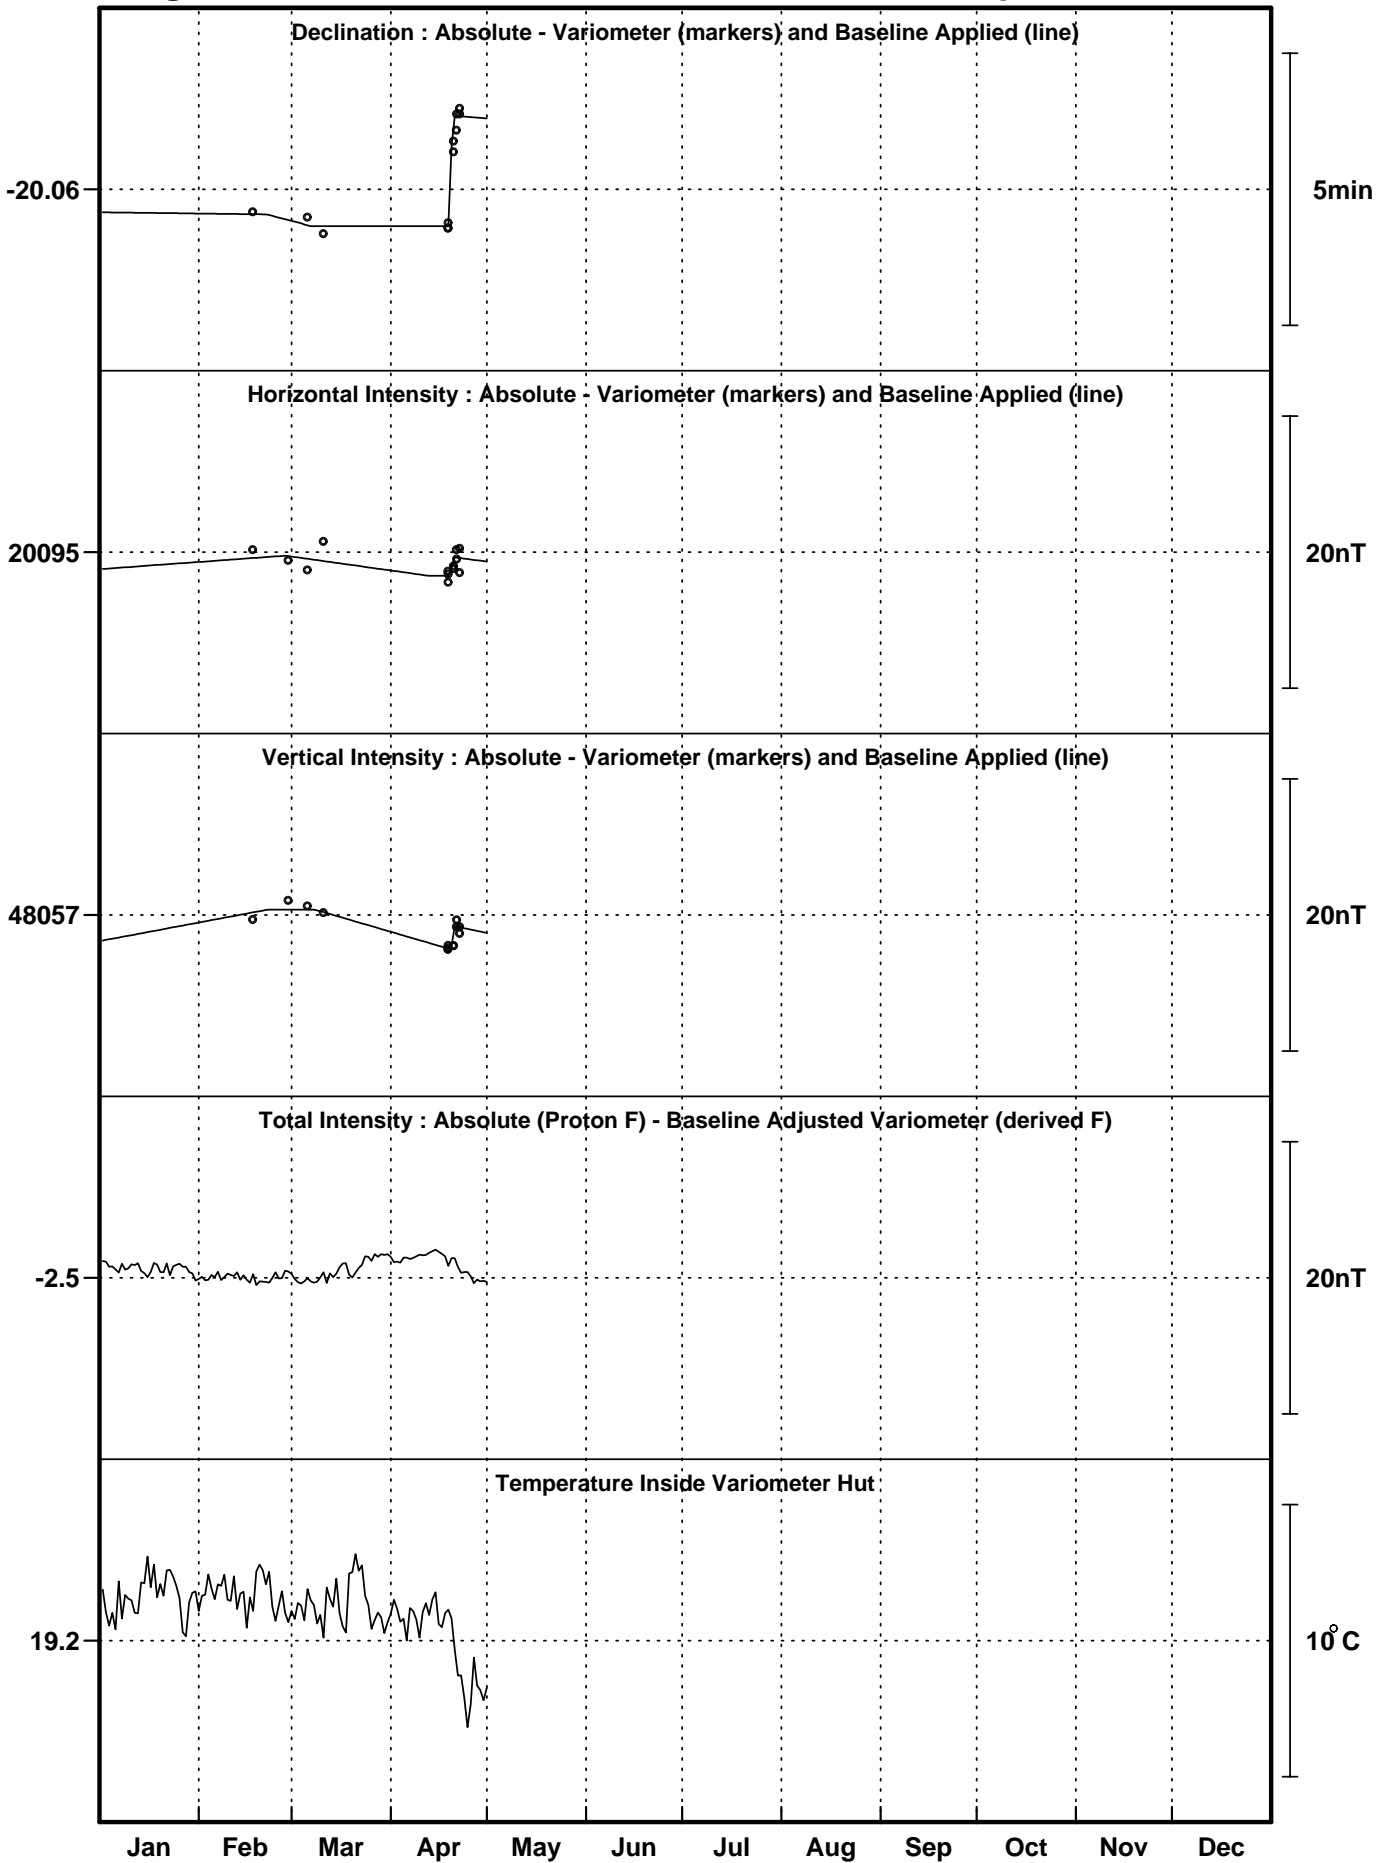


Figure 2 : Sable Island Monthly F Comparison April 2000


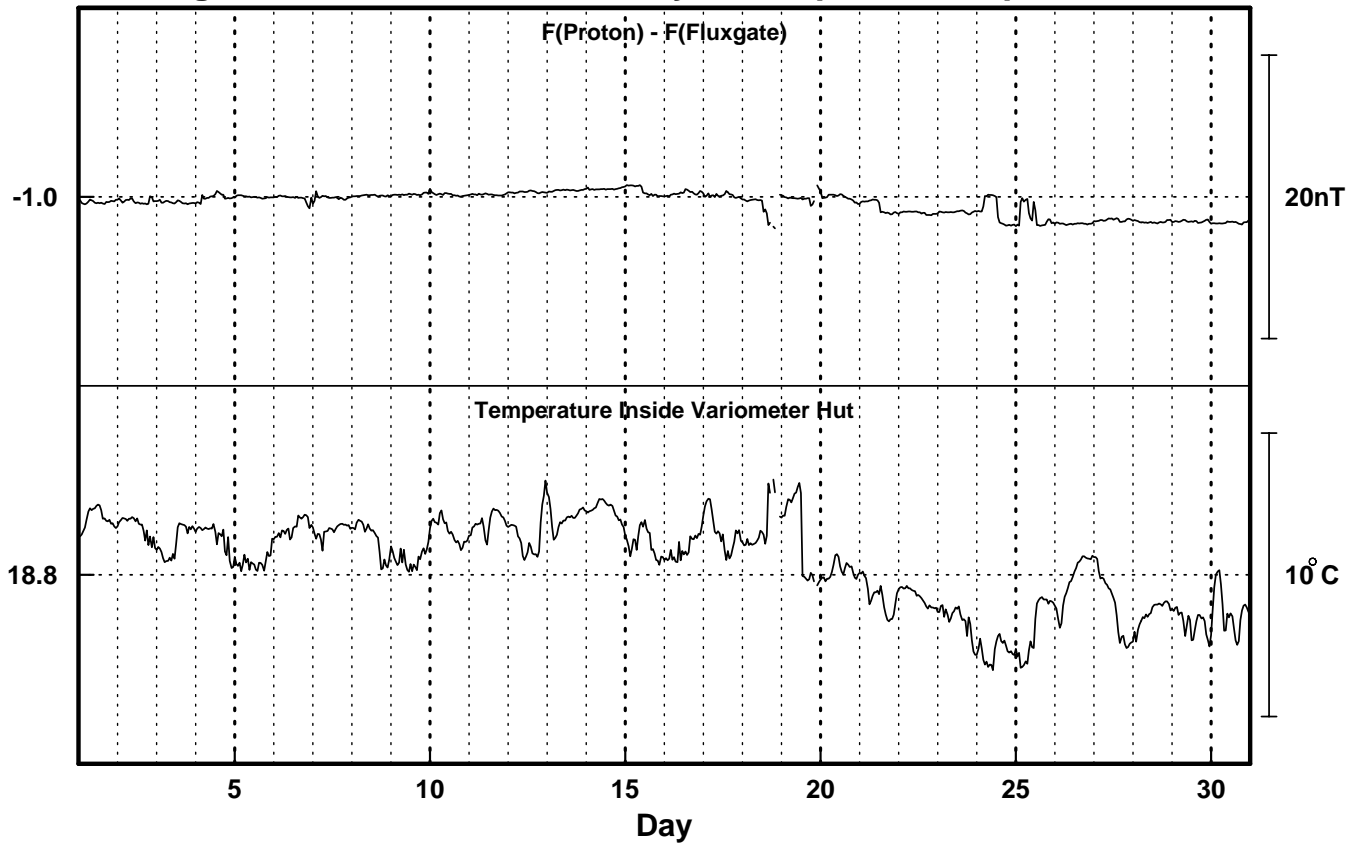


Figure 3 : Sable Island Collimation Errors 2000

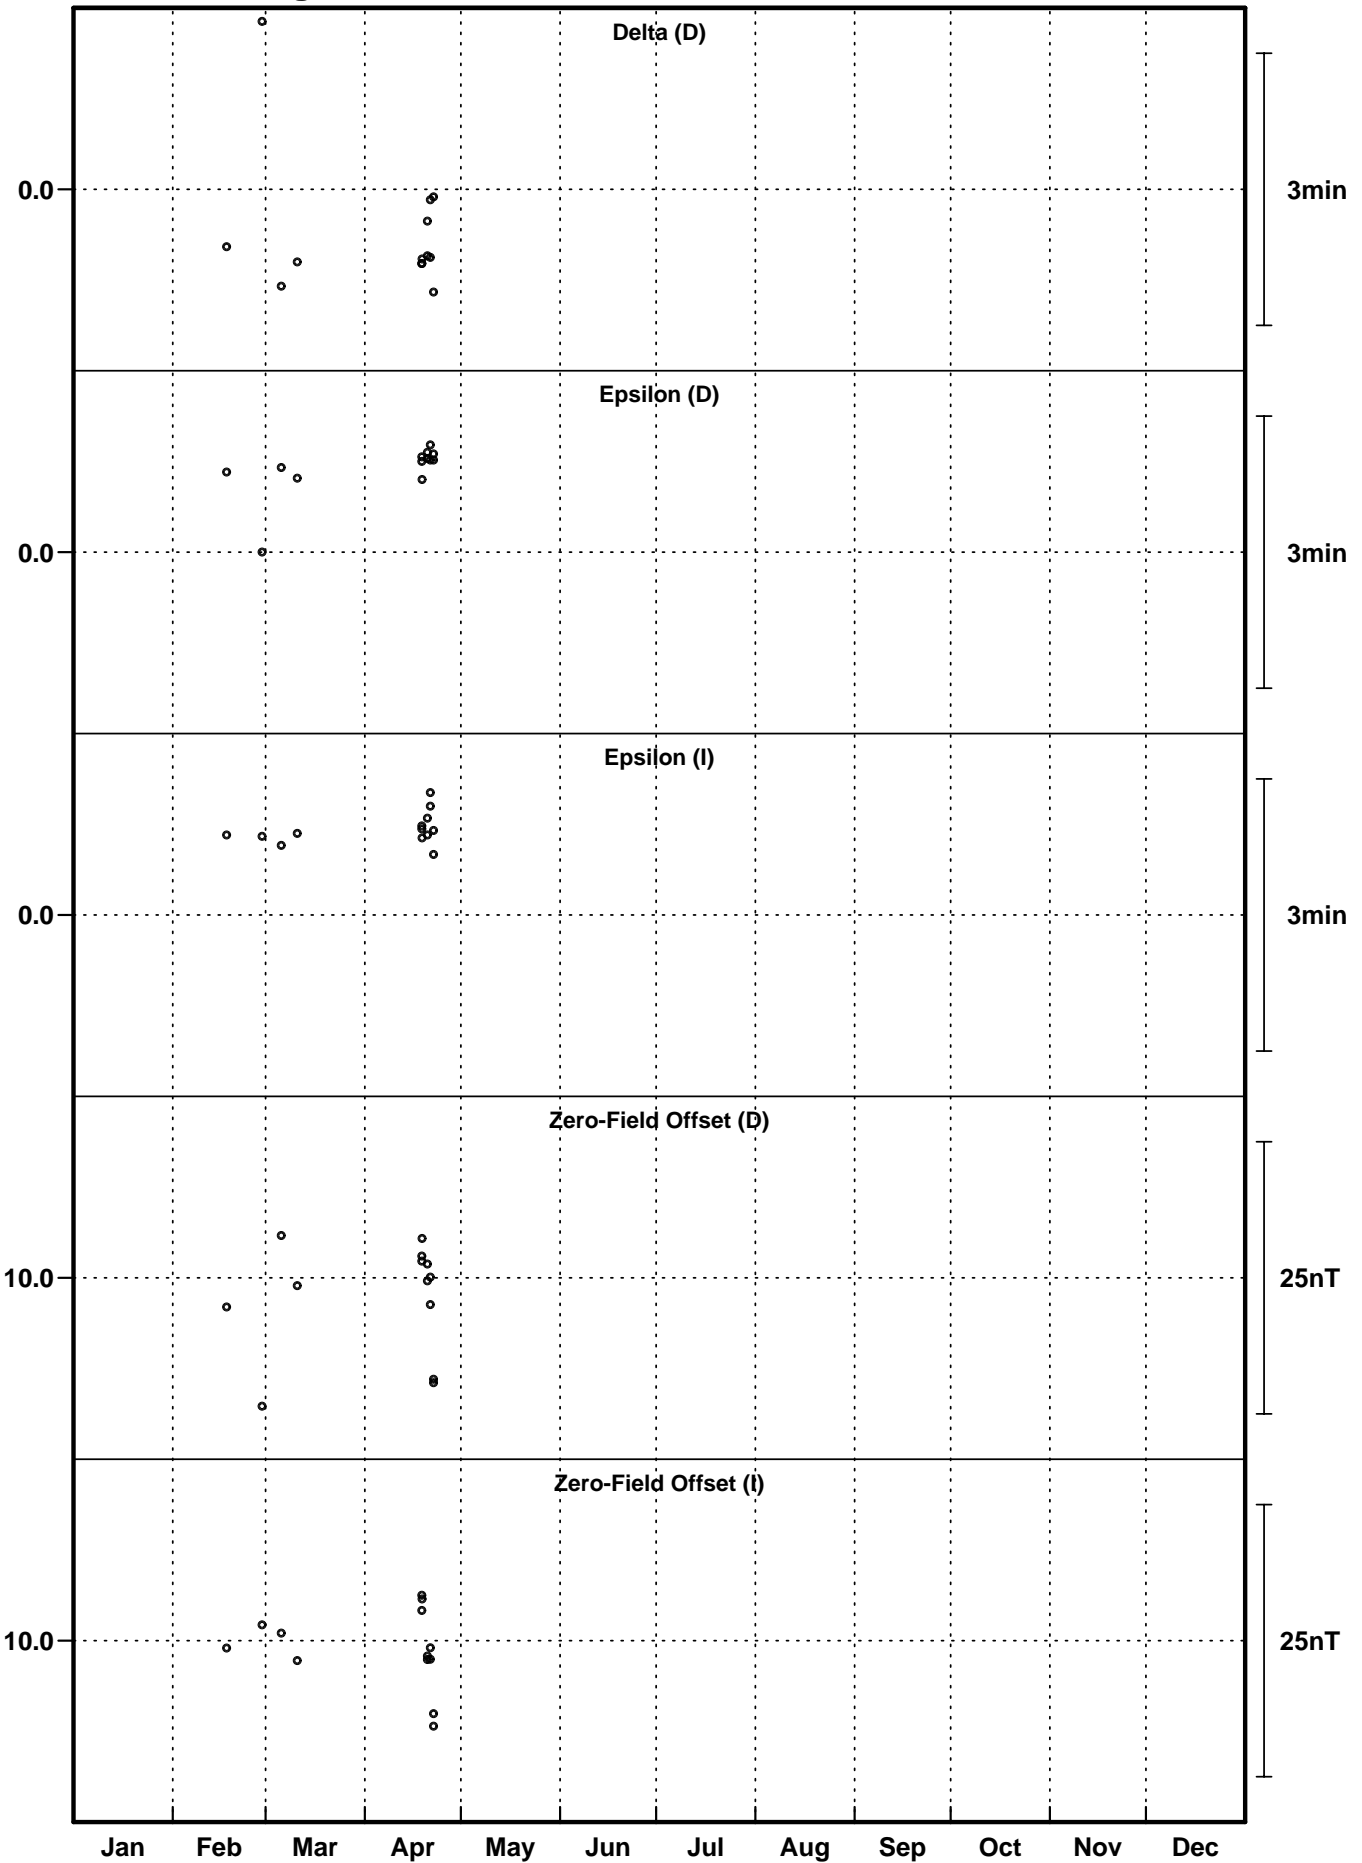

## SABLE ISLAND OBSERVATORY DIARY

**17-04-00**      The observatory instruments were installed and tested. A full description of the installation  
**to**                      work is given in Appendix G of Turbitt (BGS Technical Report CR/00/11).  
**21-04-00**

**Various**              There were three occasions when a single one-minute value was missing. The dates and  
times of these are listed in the table below. During processing these were filled using  
values interpolated from the surrounding data.

### MISSING OR CORRUPT DATA

Start (UT)		End (UT)		Total	Comments
Date	Time	Date	Time	Loss	
08-04-00	07:34	08-04-00	07:34	0:01	One-minute value not recorded
09-04-00	07:34	09-04-00	07:34	0:01	One-minute value not recorded
17-04-00	21:56	17-04-00	21:57	0:02	Service visit
17-04-00	22:09	17-04-00	22:24	0:16	Service visit
18-04-00	11:41	18-04-00	12:15	0:36	Service visit
18-04-00	13:37	18-04-00	13:39	0:03	Service visit
18-04-00	14:54	18-04-00	15:05	0:12	Service visit
18-04-00	16:57	18-04-00	18:00	0:04	Service visit
18-04-00	18:15	18-04-00	18:22	0:08	Service visit
18-04-00	19:54	18-04-00	22:13	2:21	Service visit
19-04-00	11:48	19-04-00	11:51	0:04	Service visit
19-04-00	20:02	19-04-00	20:37	0:36	Service visit
23-04-00	15:24	23-04-00	15:24	0:01	One-minute value not recorded